



**Civil Aviation
Requirements**

MCAR-Part 7

Aircraft Instruments and Equipment

Third Edition
2018

**Department of Civil Aviation
Ministry of Transport and Communications, Myanmar**

PREFACE

This requirement has been prepared for the use and guidance for instruments and equipment to be installed on aircraft expected to operate in Republic of the Union of Myanmar. This requirement also presents the standards and recommended practices in ICAO Annex 6 supplemented by sections from the United States Title 14 of the Code of Federal Regulations (14 CFR) and/or the European Joint Aviation Regulations (JAR).


The requirements in this Part address two categories of aircraft operations – AOC holder and non-AOC holder operations. The sections of this Part applicable to all aircraft address minimum requirements and are noted by the key [AAC] preceding the particular section. Additional aircraft requirements relating to commercial air transport are noted by the key [AOC] for air operator certificate holders.

The key [AAC] applies to all aircraft, whether on domestic or international flights. The key [AOC] applies to AOC holders operating in Republic of the Union of Myanmar, whether on domestic or international flights.

This requirements has been issued under authority conferred by Section 5-A (c) of the Myanmar Aircraft Act (1934), and approved by the Director General.

Enquires on the contents of this part should be addressed to;

Director (Airworthiness)
Airworthiness Division
Department of Civil Aviation
Yangon International Airport, Yangon 11021
Tel: 95 – 1 – 533 003
95 – 1 – 533 014
Fax: 95 – 1 – 533 016



Director General
Department of Civil Aviation
Republic of the Union of Myanmar

Amendment History

Second Edition

April 2010

In second edition, changes to conform to the current ICAO Standard and Recommended Practices and editorial changes have been made to the following sections and sub-sections:-

7.1.1.2, 7.2.1.2, 7.2.1.4, 7.3.1.1, 7.4.1.3, 7.5.1.2, 7.6.1.1, 7.7.1.5, 7.7.1.7, 7.8.1.1, 7.8.1.2, 7.8.1.3, 7.8.1.4, 7.9.1.5, 7.9.1.10, 7.9.1.11, 7.9.1.12, 7.9.1.13, 7.9.1.14, 7.9.1.15, 7.9.1.16, 7.9.1.17, 7.9.1.18, 7.10.1.2, 7.10.1.3, 7.10.1.12, APP: 7.9.1.11, APP: 7.9.1.12

Third Edition

November 2018

In third edition, changes to conform to the current ICAO Standard and Recommended Practices and editorial changes have been made to the following sections and sub-sections:-

7.1.1.2, 7.1.1.3, 7.1.1.4, 7.2.1.2, 7.2.1.4, 7.2.1.5, 7.2.1.9, 7.3.1.1, 7.3.1.2, 7.3.1.4, 7.4.1.1, 7.4.1.3, 7.4.1.5, 7.7.1.2, 7.7.1.7, 7.8, 7.9.1.5, 7.9.1.6, 7.9.1.7, 7.9.1.11, 7.9.1.19, 7.10.1.2, 7.10.1.3, 7.10.1.13, APP: 7.4.1.3, APP: 7.8.1.1, APP: 7.8.1.4, APP: 7.9.1.11, APP: 7.9.1.19

[Intentionally Left Blank]

[Intentionally Left Blank]

CONTENTS

7.1	GENERAL	4
7.1.1.1	APPLICABILITY	4
7.1.1.2	DEFINITIONS	4
7.1.1.3	ABBREVIATIONS	9
7.1.1.4	GENERAL INSTRUMENT AND EQUIPMENT REQUIREMENTS	11
7.2	FLIGHT INSTRUMENTS	12
7.2.1.1	GENERAL REQUIREMENTS	12
7.2.1.2	MINIMUM FLIGHT INSTRUMENTS	12
7.2.1.3	INSTRUMENTS FOR OPERATIONS REQUIRING TWO PILOTS IN DAY VFR	12
7.2.1.4	INSTRUMENTS REQUIRED FOR IFR OPERATIONS	13
7.2.1.5	INSTRUMENTS FOR OPERATION AT NIGHT	15
7.2.1.6	STANDBY ATTITUDE INDICATOR	16
7.2.1.7	INSTRUMENTS AND EQUIPMENT FOR CATEGORY II OPERATIONS	16
7.2.1.8	INSTRUMENTS AND EQUIPMENT FOR CATEGORY III OPERATIONS	17
7.2.1.9	AEROPLANES EQUIPPED WITH AUTOMATIC LANDING SYSTEMS, A HEAD-UP DISPLAY (HUD) OR EQUIVALENT DISPLAYS, ENHANCED VISION SYSTEMS (EVS), SYNTHETIC VISION SYSTEMS (SVS) AND/OR COMBINED VISION SYSTEMS (CVS)	19
7.3	COMMUNICATIONS EQUIPMENT	19
7.3.1.1	RADIO EQUIPMENT	19
7.3.1.2	FLIGHTCREW AND CREW MEMBER INTERPHONE SYSTEM FOR AEROPLANES	20
7.3.1.3	PUBLIC ADDRESS SYSTEM – AOC HOLDERS	21
7.3.1.4	MICROPHONES	22
7.4	NAVIGATION EQUIPMENT	22
7.4.1.1	NAVIGATION EQUIPMENT—GENERAL	22
7.4.1.2	MNPS23	
7.4.1.3	REDUCED VERTICAL SEPARATION MINIMUM (RVSM)	23
7.4.1.4	ELECTRONIC NAVIGATION DATA MANAGEMENT	24
7.4.1.5	ALTITUDE REPORTING TRANSPONDER	24
7.5	AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION	25
7.5.1.1	REQUIRED AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION	25
7.5.1.2	REQUIRED AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION FOR COMMERCIAL AIR TRANSPORT OPERATIONS	25
7.6	ENGINE INSTRUMENTS	25
7.6.1.1	ENGINE INSTRUMENTS	25
7.7	WARNING INSTRUMENTS AND SYSTEMS	26
7.7.1.1	MACH NUMBER INDICATOR	26
7.7.1.2	LOSS OF PRESSURISATION INDICATOR	26

7.7.1.3	LANDING GEAR INDICATOR POSITION AND AURAL WARNING DEVICE.....	27
7.7.1.4	ALTITUDE ALERTING SYSTEM.....	27
7.7.1.5	GROUND PROXIMITY WARNING SYSTEM.....	27
7.7.1.6	WEATHER RADAR.....	28
7.7.1.7	AIRBORNE COLLISION AVOIDANCE SYSTEM (ACAS).....	28
7.7.1.8	FORWARD LOOKING WIND SHEAR WARNING SYSTEM—TURBOJET AEROPLANES	28
7.8	FLIGHT RECORDERS.....	29
7.8.1	FLIGHT RECORDERS SYSTEMS.....	29
7.8.1.1	FLIGHT DATA RECORDERS (FDR) AND AIRCRAFT DATA RECORDING SYSTEMS (ADRS)	29
7.8.1.2	COCKPIT VOICE RECORDERS AND COCKPIT AUDIO RECORDING SYSTEMS.....	31
7.8.1.3	DATA LINK RECORDERS (DLR) AND DATA LINK RECORDING SYSTEMS (DLRS).....	33
7.8.1.4	FLIGHT CREW-MACHINE INTERFACE RECORDINGS/ AN AIRBORNE IMAGE RECORDER (AIR).....	34
7.8.2	CONSTRUCTION AND INSTALLATION.....	34
7.8.3	OPERATION	35
7.8.4	CONTINUED SERVICEABILITY AND INSPECTION OF FLIGHT RECORDER SYSTEMS	35
7.8.5	FLIGHT RECORDER DOCUMENTATION.....	35
7.8.6	COMBINATION RECORDERS	35
7.8.7	FLIGHT RECORDER DATA RECOVERY	36
7.9	EMERGENCY, RESCUE, AND SURVIVAL EQUIPMENT	36
7.9.1.1	EMERGENCY EQUIPMENT: ALL AIRCRAFT	36
7.9.1.2	EMERGENCY EXIT EQUIPMENT - PASSENGERS	36
7.9.1.3	VISUAL SIGNALLING DEVICES.....	42
7.9.1.4	SURVIVAL KITS.....	42
7.9.1.5	EMERGENCY LOCATOR TRANSMITTER.....	42
7.9.1.6	PORTABLE FIRE EXTINGUISHERS	44
7.9.1.7	LAVATORY FIRE EXTINGUISHER	45
7.9.1.8	LAVATORY SMOKE DETECTOR.....	45
7.9.1.9	CRASH AXE.....	45
7.9.1.10	MARKING OF BREAK-IN POINTS.....	46
7.9.1.11	MEDICAL SUPPLIES	46
7.9.1.12	OXYGEN STORAGE AND DISPENSING APPARATUS	47
7.9.1.13	PROTECTIVE BREATHING EQUIPMENT	47
7.9.1.14	FIRST AID OXYGEN DISPENSING UNITS	48
7.9.1.15	MEGAPHONES.....	48
7.9.1.16	INDIVIDUAL FLOTATION DEVICES.....	49
7.9.1.17	LIFE RAFTS	49
7.9.1.18	FLOTATION DEVICE FOR HELICOPTER DITCHING	49
7.9.1.19	LOCATION OF AN AEROPLANE IN DISTRESS.....	50
7.10	MISCELLANEOUS SYSTEMS AND EQUIPMENT	50
7.10.1.1	SEATS, SAFETY BELTS, AND SHOULDER HARNESSSES	50
7.10.1.2	PASSENGER AND PILOT COMPARTMENT DOORS –AEROPLANES.....	50
7.10.1.3	PASSENGER INFORMATION SIGNS	51
7.10.1.4	MATERIALS FOR CABIN INTERIORS	51
7.10.1.5	MATERIALS FOR CARGO AND BAGGAGE COMPARTMENTS.....	52
7.10.1.6	POWER SUPPLY, DISTRIBUTION, AND INDICATION SYSTEM.....	52
7.10.1.7	PROTECTIVE CIRCUIT FUSES	52

7.10.1.8	ICING PROTECTION EQUIPMENT	52
7.10.1.9	PITOT HEAT AND INDICATION SYSTEMS	52
7.10.1.10	STATIC PRESSURE SYSTEM	53
7.10.1.11	WINDSHIELD WIPERS	53
7.10.1.12	CHART HOLDER	53
7.10.1.13	COSMIC RADIATION DETECTION EQUIPMENT	53
7.10.1.14	MARITIME SOUND SIGNALLING DEVICE	54
7.10.1.15	ANCHORS	54
 APPENDICES TO MCAR PART-7		APPX: j
APP: 7.2.1.7	CATEGORY II: INSTRUMENTS AND EQUIPMENT APPROVAL AND MAINTENANCE REQUIREMENTS	APPX: 2
APP: 7.4.1.3	REDUCED VERTICAL SEPARATION MINIMUM—ALTIMETRY SYSTEM PERFORMANCE REQUIREMENTS FOR OPERATIONS IN RVSM AIRSPACE	APPX: 5
APP: 7.8.1.1	FLIGHT DATA RECORDERS (FDR) AND AIRCRAFT DATA RECORDING SYSTEMS (ADRS)	APPX: 5
APP: 7.8.1.4	FLIGHT CREW-MACHINE INTERFACE RECORDINGS/ AN AIRBORNE IMAGE RECORDER (AIR)	APPX: 22
APP: 7.9.1.2	EMERGENCY EXIT EQUIPMENT - PASSENGERS	APPX: 23
APP: 7.9.1.11	TYPES, NUMBER, LOCATION AND CONTENTS OF MEDICAL SUPPLIES	25
APP: 7.9.1.12	OXYGEN STORAGE AND DISPENSING APPARATUS	APPX: 28
APP: 7.9.1.19	LOCATION OF AN AEROPLANE IN DISTRESS	APPX: 31
APP: 7.10.1.13	COSMIC RADIATION DETECTION EQUIPMENT	APPX: 32

7.1 GENERAL

This part has been written so that approvals to AOC holder are done through operations specifications and approvals to non-AOC holders, such as general aviation, are done through letters of authorization.

7.1.1.1 APPLICABILITY

- (a) This part prescribes the minimum instrument and equipment requirements for all aircraft in all operations.
- (b) This part use the following key designators—
 - (1) AAC: all aircraft — non-AOC Holders and AOC Holders appropriate to the subject of the regulations, e.g., an all aircraft regulation may only refer to seaplanes, but will include seaplanes operated by non-AOC Holders and AOC seaplanes.
 - (2) AOC: AOC Holders are operators engaged in commercial air transport. Where AOC requirements are more detailed, the AOC requirements will be followed.

7.1.1.2 DEFINITIONS

When the following terms are used in this part, they have the following meanings —

- (1) **Aerial Work.** An aircraft operation in which an aircraft is used for specialized services such as agriculture, construction, photography, surveying, observation and patrol, search and rescue, aerial advertisement, etc.
- (2) **Aerodrome.** A defined area on land or water (including any buildings, installations and equipment) intended to be used either wholly or in part for the arrival, departure and surface movement of aircraft.
- (3) **Aeroplane.** A power-driven heavier-than-air aircraft, deriving its lift in flight chiefly from aerodynamic reactions on surfaces which remain fixed under given conditions of flight.
- (4) **Aircraft.** Any machine that can derive support in the atmosphere from the reactions of the air other than the reactions of the air against the earth's surface.
- (5) **Air Operator Certificate (AOC).** A certificate authorizing an operator to carry out specified commercial air transport operations.
- (6) **Airworthy.** The status of an aircraft, engine, propeller or part when it conforms to its approved design and is in a condition for safe operation.
- (7) **Alternate Aerodrome.** An aerodrome to which an aircraft may proceed when it becomes either impossible or inadvisable to proceed to or to land at the aerodrome of intended landing where the necessary services and facilities are available, where aircraft performance requirements can be met and which is operational at the expected time of use. Alternate aerodromes include the following:
 - (i) **Take-off Alternate.** An alternate aerodrome at which an aircraft would be able to land should this become necessary shortly after take-off and it is not possible to use the aerodrome of departure.

- (ii) **En-route Alternate.** An alternate aerodrome at which an aircraft would be able to land in the event that a diversion becomes necessary while en route.
 - (iii) **Destination Alternate.** An alternate aerodrome at which an aircraft would be able to land should it become either impossible or inadvisable to land at the aerodrome of intended landing.
- (8) **Area Navigation (RNAV).** A method of navigation which permits aircraft operation on any desired flight path within the coverage of ground- or space-based navigation aids or within the limits of the capability of self-contained aids, or a combination of these.
- (9) **Cabin Crew Member.** A crew member who performs, in the interest of safety of passengers, duties assigned by the operator or the pilot-in-command of the aircraft, but who shall not act as a flight crew member.
- (10) **Category One Operation (CAT I).** A precision instrument approach and landing with a decision height not lower than 60 m (200 ft) and with either a visibility not less than 800 m or a runway visual range not less than 550 m.
- (11) **Category Two Operation (CAT II).** A precision instrument approach and landing with a decision height lower than 60 m (200 ft), but not lower than 30 m (100 ft) and a runway visual range not less than 300 m.
- (12) **Category Three A (CAT IIIA) Operation.** A precision instrument approach and landing with:
 - (i) A decision height lower than 30 m (100 ft) or no decision height; and
 - (ii) A runway visual range not less than 175 m.
- (13) **Category Three B (CAT IIIB) Operation.** A precision instrument approach and landing with:
 - (i) A decision height lower than 15 m (50 ft) or no decision height; and
 - (ii) A runway visual range less than 175 m but not less than 50 m.
- (14) **Category Three C (CAT IIIC) Operation.** A precision instrument approach and landing with no decision height and no runway visual range limitations.
- (15) **Ceiling.** The height above the ground or water of the base of the lowest layer of cloud below 6000 metres (20000 feet) covering more than half the sky.
- (16) **Commercial Air Transport Operation.** An aircraft operation involving the transport of passengers, cargo or mail for remuneration or hire.
- (17) **Continuing airworthiness.** The set of processes by which an aircraft, engine, propeller or part complies with the applicable airworthiness requirements and remains in a condition for safe operation throughout its operating life.
- (18) **Contracting State.** A Contracting State of ICAO is a State which has adhered to the Chicago Convention on International Civil Aviation, whether or not it is a member of the United Nations (UN) and/or any of its other Agencies
- (19) **Controlled Flight Into Terrain.** Occurs when an airworthy aircraft is flown, under the control of a qualified pilot, into terrain (water or obstacles) with inadequate awareness on the part of the pilot of the impending collision.
- (20) **Crew Member.** A person assigned by an operator to duty on an aircraft during a flight duty period.

- (21) **Decision Altitude (DA) or Decision Height (DH).** A specified altitude or height in a 3D instrument approach operation at which a missed approach must be initiated if the required visual reference to continue the approach has not been established.

(Note. 1— Decision altitude (DA) is referenced to mean sea level and decision height (DH) is referenced to the threshold elevation.)

(Note. 2.— The required visual reference means that section of the visual aids or of the approach area which should have been in view for sufficient time for the pilot to have made an assessment of the aircraft position and rate of change of position, in relation to the desired flight path. In Category III operations with a decision height the required visual reference is that specified for the particular procedure and operation)

(Note. 3.— For convenience where both expressions are used they may be written in the form "decision altitude/height" and abbreviated "DA/H")

- (22) **Duty.** Any task that flight or cabin crew members are required by the operator to perform, including, for example, flight duty, administrative work, training, positioning and standby when it is likely to induce fatigue.
- (23) **Engine.** A unit used or intended to be used for aircraft propulsion. It consists of at least those components and equipment necessary for functioning and control, but excludes the propeller/rotors (if applicable).
- (24) **Emergency Locator Transmitter (ELT).** A generic term describing equipment which broadcast distinctive signals on designated frequencies and, depending on application, may be automatically activated by impact or be manually activated. An ELT may be any of the following:
- (i) **Automatic fixed ELT.** An automatically activated ELT which is permanently attached to an aircraft.
 - (ii) **Automatic portable ELT.** An automatically activated ELT which is rigidly attached to an aircraft but readily removable from the aircraft.
 - (iii) **Automatically deployable ELT.** An ELT which is rigidly attached to an aircraft and which is automatically deployed and activated by impact, and in some cases, also by hydrostatic sensors. Manual deployment is also provided.
 - (iv) **Survival ELT –** An ELT which is removable from an aircraft, stowed so as to facilitate its ready use in an emergency, and manually activated by survivors.
 - (v) **ELT battery useful life.** The length of time after its date of manufacture or recharge that the battery or battery pack may be stored under normal environmental conditions without losing its ability to allow the ELT to meet the applicable performance standards.
 - (vi) **ELT battery expiration date.** The date of battery manufacture or recharge plus one half of its useful life.
- (25) **Enhanced Ground Proximity Warning System (EGPWS).** A forward looking warning system that uses the terrain data base for terrain avoidance.
- (26) **Enhanced vision system (EVS).** A system to display electronic real-time images of the external scene achieved through the use of image sensors.
- (27) **Flight Crew Member.** A licensed crew member charged with duties essential to the operation of an aircraft during a flight duty period.

- (28) **Flight data analysis.** A process of analysing recorded flight data in order to improve the safety of flight operations.
- (29) **Flight Manual.** A manual, associated with the certificate of airworthiness, containing limitations within which the aircraft is to be considered airworthy, and instructions and information necessary to the flight crew members for the safe operation of the aircraft.
- (30) **Flight Plan.** Specified information provided to air traffic services units, relative to an intended flight or portion of a flight of an aircraft.
- (31) **Flight Recorder.** Any type of recorder installed in the aircraft for the purpose of complementing accident/incident investigation. This could include the cockpit voice recorder (CVR) or flight data recorder (FDR).
- (32) **Flight Time — aeroplanes.** The total time from the moment an aeroplane first moves for the purpose of taking off until the moment it finally comes to rest at the end of the flight.
- (33) **General Aviation Operation.** An aircraft operation other than a commercial air transport operation or an aerial work operation.
- (34) **Ground Proximity Warning System (GPWS).** A warning system that uses radar altimeters to alert the pilots of hazardous flight conditions.
- (35) **Head-up display (HUD).** A display system that presents flight information into the pilot's forward external field of view.
- (36) **High Speed Aural Warning.** A speed warning that is required for turbine-engined airplanes and airplanes with a V_{MO}/M_{MO} greater than $0.80 V_{DF}/M_{DF}$ or V_D/M_D .
- (37) **Helicopter.** A heavier-than-air aircraft supported in flight chiefly by the reactions of the air on one or more power-driven rotors on substantially vertical axis.
- (i) **Performance Class 1 helicopter.** A helicopter with performance such that, in case of engine failure, it is able to land on the rejected take-off area or safely continue the flight to an appropriate landing area.
 - (ii) **Performance Class 2 helicopter.** A helicopter with performance such that, in case of engine failure, it is able to safely continue the flight, except when the failure occurs prior to a defined point after take-off or after a defined point before landing, in which case a forced landing may be required.
 - (iii) **Performance Class 3 helicopter.** A helicopter with performance such that, in case of engine failure at any point in the flight profile, a forced landing must be performed.
- (38) **Instrument meteorological conditions (IMC).** Meteorological conditions expressed in terms of visibility, distance from cloud, and ceiling, less than the minima specified for visual meteorological conditions.
- (39) **Long Range Overwater Flights.** Routes on which an aeroplane may be over water and at more than a distance corresponding to 120 minutes at cruising speed or 740 km (400 NM), whichever is the lesser, away from land suitable for making an emergency landing.
- (40) **Low Altitude Wind Shear Warning and Guidance System.** A system that will issue a warning of low altitude wind shear and in some cases provide the pilot with guidance information of the escaper manoeuvre.

- (41) **Mach Number Indicator.** An indicator that shows airspeed as a function of the Mach number.
- (42) **Maintenance.** The performance of tasks required to ensure the continuing airworthiness of an aircraft, including any one or combination of overhaul, inspection, replacement, defect rectification, and the embodiment of a modification or repair.
- (43) **Maintenance Programme (Program).** A document which describes the specific scheduled maintenance tasks and their frequency of completion and related procedures, such as a reliability programme, necessary for the safe operation of those aircraft to which it applies.
- (44) **Master Minimum Equipment List (MMEL).** A list established for a particular aircraft type by the organization responsible for the type design with the approval of the State of Design containing items, one or more of which is permitted to be unserviceable at the commencement of a flight. The MMEL may be associated with special operating conditions, limitations or procedures.
- (45) **Maximum Mass.** Maximum certificated take-off mass.
- (46) **Minimum Equipment List (MEL).** A list which provides for the operation of aircraft, subject to specified conditions, with particular equipment inoperative, prepared by an operator in conformity with, or more restrictive than, the MMEL established for the aircraft type.
- (47) **Navigation Specification.** A set of aircraft and flight crew requirements needed to support performance-based navigation operations within a defined airspace. There are two kinds of navigation specifications:
 - (i) **Required Navigation Performance (RNP) Specification.** A navigation specification based on area navigation that includes the requirement for performance monitoring and alerting, designated by the prefix RNP, e.g. RNP 4, RNP APCH.
 - (ii) **Area Navigation (RNAV) Specification.** A navigation specification based on area navigation that does not include the requirement for performance monitoring and alerting, designated by the prefix RNAV, e.g. RNAV 5, RNAV 1.
- (48) **Night.** The hours between the end of evening civil twilight and the beginning of morning civil twilight or such other period between sunset and sunrise, as may be prescribed by the appropriate authority.
- (49) **Operational Flight Plan.** The operator's plan for the safe conduct of the flight based on considerations of aeroplane performance, other operating limitations and relevant expected conditions on the route to be followed and at the aerodromes concerned.
- (50) **Operations Manual.** A manual containing procedures, instructions and guidance for use by operational personnel in the execution of their duties.
- (51) **Operations Specifications.** The authorizations, conditions and limitations associated with the air operator certificate and subject to the conditions in the operations manual.
- (52) **Operator.** A person, organization or enterprise engaged in or offering to engage in an aircraft operation.
- (53) **Performance-Based Navigation (PBN).** Area navigation based on performance requirements for aircraft operating along an ATS route, on an instrument approach procedure or in a designated airspace.

- (54) **Pressure-Altitude.** An atmospheric pressure expressed in terms of altitude which corresponds to that pressure in the Standard Atmosphere.
- (55) **Repair.** The restoration of an aeronautical product to an airworthy condition to ensure that the aircraft continues to comply with the design aspects of the appropriate airworthiness requirements used for the issuance of the type certificate for the respective aircraft type, after it has been damaged or subjected to wear.
- (56) **Required Communication Performance (RCP) Specification.** A set of requirements for air traffic service provision and associated ground equipment, aircraft capability, and operations needed to support performance-based communication.
- (57) **Required Communication Performance Type (RCP type).** A label (e.g. RCP 240) that represents the values assigned to RCP parameters for communication transaction time, continuity, availability and integrity.
- (58) **Required Navigation Performance (RNP).** A statement of the navigation performance necessary for operations with a defined airspace.
- (59) **Runway Visual Range (RVR).** The range over which the pilot of an aircraft on the center line of a runway can see the runway surface markings or the lights delineating the runway or identifying its centre line.
- (60) **Safe Forced Landing.** Unavoidable landing or ditching with a reasonable expectancy of no injuries to persons in the aircraft or on the surface.
- (61) **State of Registry.** The State on whose register the aircraft is entered.
- (62) **State of the Operator.** The State in which the operator's principal place of business is located or, if there is no such place of business, the operator's permanent residence.
- (63) **Terrain Awareness Warning System (TAWS).** A system that provides the flight crew with sufficient information and alerting to detect a potentially hazardous terrain situation and so the flight crew may take effective action to prevent a controlled flight into terrain (CFIT) event.
- (64) **Visual Meteorological Conditions (VMC).** Meteorological conditions expressed in terms of visibility, distance from cloud, and ceiling, equal to or better than specified minima.

7.1.1.3 ABBREVIATIONS

The following acronyms are used in this Part :

- (1) AAC – All aircraft
- (2) ADF – Automatic Direction Finder
- (3) ADRS – Aircraft Data Recording System
- (4) AFM – Aeroplane Flight Manual
- (5) AIR – Airborne Image Recorder
- (6) AOC – Air Operator Certificate
- (7) CARS – Cockpit Audio Recording System

- (8) CAT – Commercial Air Transport
- (9) CAT I – Category One
- (10) CAT II – Category Two
- (11) CAT IIIA – Category Three A
- (12) CAT IIIB – Category Three B
- (13) CAT IIIC – Category Three C
- (14) CFIT – Controlled Flight Into Terrain
- (15) CVR – Cockpit Voice Recorder
- (16) DCA – Department of Civil Aviation, Myanmar
- (17) DH – Decision Height
- (18) DME – Distance Measuring Equipment
- (19) DLR – Data – link Recorder
- (20) DLRS – Data – link Recording System
- (21) EGPWS – Enhanced Ground Proximity Warning System
- (22) ELT – Emergency Locator Transmitter
- (23) ELT (AD) – Automatically deployable ELT
- (24) ELT(AF) – Automatic fixed ELT
- (25) ELT(AP) – Automatic portable EL
- (26) ELT(S) – Survival ELT
- (27) EVS – Enhanced Vision System
- (28) FDR – Flight Data Recorder
- (29) GPS – Global Positioning System
- (30) GPWS – Ground Proximity Warning System
- (31) HUD – Head Up Display
- (32) ILS – Instrument Landing System
- (33) IFR – Instrument Flight Rules
- (34) IMC – Instrument Meteorological Conditions
- (35) LRNS – Long Range Navigation Systems
- (36) MACH – Mach Number Indicator
- (37) MCAR – Myanmar Civil Aviation Requirements
- (38) MEL – Minimum Equipment List
- (39) MHz – Megahertz
- (40) MLS – Microwave Landing System
- (41) MNPS – Minimum Navigation Performance Specifications
- (42) NDB – Nondirectional Beacon

- (43) PBE – Protective Breathing Equipment
- (44) RCP – Required Communication Performance
- (45) RNAV – Area Navigation
- (46) RNP – Required Navigation Performance
- (47) RVR – Runway Visual Range
- (48) RVSM – Reduced Vertical Separation Minimum
- (49) SSR – Secondary Surveillance Radar
- (50) TAWS – Terrain Awareness Warning System
- (51) VFR – Visual Flight Rules
- (52) VMC – Visual Meteorological Conditions
- (53) VOR – VHF Omnidirectional Radorange
- (54) VSM – Vertical Separation Minimum

7.1.1.4 GENERAL INSTRUMENT AND EQUIPMENT REQUIREMENTS

- (a) [AAC] In addition to the minimum equipment necessary for the issuance of a certificate of airworthiness, the instruments, equipment and flight documents prescribed in this Part shall be installed or carried, as appropriate, in aircraft according to the aircraft used and to the circumstances under which the flight is to be conducted.
- (b) [AAC] All required instruments and equipment shall be approved and installed in accordance with applicable airworthiness requirements.
- (c) [AAC] Prior to operation in Republic of the Union of Myanmar of any aircraft not registered in Republic of the Union of Myanmar that uses an airworthiness inspection program approved or accepted by the State of Registry, the owner/operator shall ensure that instruments and equipment required by Republic of the Union of Myanmar but not installed in the aircraft are properly installed and inspected in accordance with the requirements of the State of Registry.
- (d) [AOC] No person shall commence a flight in commercial air transport operations unless the required equipment—
 - (1) meets the minimum performance standard, all operational and airworthiness requirements and the relevant provisions of ICAO Annex 10, Volume IV.
 - (2) is installed such that the failure of any single unit required for either communication or navigation purposes, or both, will not result in the inability to communicate and/or navigate safely on the route being flown.
 - (3) is in operable condition for the kind of operation being conducted, except as provided in the MEL.
- (e) [AAC] If equipment is to be used by one flight crew member at his or her station during flight, it shall be installed so as to be readily operable from that flight crewmember's station.
- (f) [AAC] When a single item of equipment is required to be operated by more than one flight crew member, it shall be installed so that the equipment is readily operable from any station at which the equipment is required to be operated.

7.2 FLIGHT INSTRUMENTS

7.2.1.1 GENERAL REQUIREMENTS

- (a) [AAC] All aircraft shall be equipped with flight instruments which will enable the flight crew to—
 - (1) control the flight path of the aircraft;
 - (2) carry out any required procedural manoeuvres; and
 - (3) observe the operating limitations of the aircraft in the expected operating conditions.
- (b) [AAC] When a means is provided for transferring an instrument from its primary operating system to an alternative system, the means shall include a positive positioning control and shall be marked to indicate clearly which system is being used.
- (c) [AAC] Those instruments that are used by any one pilot shall be so arranged as to permit the pilot to see the indications readily from his or her station, with the minimum practicable deviation from the position and line of vision which he or she normally assumes when looking forward along the flight path.

7.2.1.2 MINIMUM FLIGHT INSTRUMENTS

- (a) [AAC] No person may operate any powered aircraft unless it is equipped with the following flight instruments for VFR operations:
 - (1) An airspeed indicating system calibrated in knots, miles per hour or kilometers per hour.
 - (2) A sensitive pressure altimeter calibrated in feet with a sub-scale setting calibrated in hectopascals/millibars, adjustable for any barometric pressure likely to be set during flight.
 - (3) An accurate timepiece indicating the time in hours, minutes, and seconds. For non-AOC operations, either equipage or carriage is acceptable.
 - (4) A magnetic compass.
 - (5) Any other equipment as prescribed by the appropriate Authority.
- (b) [AAC] VFR flights which are operated as controlled flights shall be equipped in accordance with 7.2.1.4.

7.2.1.3 INSTRUMENTS FOR OPERATIONS REQUIRING TWO PILOTS IN DAY VFR

[AAC] Whenever two pilots are required, each pilot's station shall have separate flight instruments as follows:

- (1) An airspeed indicator calibrated in knots, miles per hour or kilometers per hour;
- (2) A sensitive pressure altimeter calibrated in feet with a sub-scale setting calibrated in hectopascals/millibars, adjustable for any barometric pressure likely to be set during flight;
- (3) A vertical speed indicator;
- (4) A turn and slip indicator, or a turn co-coordinator incorporating a slip indicator;
- (5) An attitude indicator;
 - (i) A stabilised direction indicator, and
 - (ii) Any other equipment as required by the appropriate Authority.

7.2.1.4 INSTRUMENTS REQUIRED FOR IFR OPERATIONS

(a) [AAC] In addition to the requirements in 7.2.1.1 and 7.2.1.2, all aeroplanes when operated in IFR, or when the aircraft cannot be maintained in a desired altitude without reference to one or more flight instruments, shall be equipped with-

(1) A means of measuring and displaying:

- (i) Magnetic heading (standby compass);
- (ii) the time in hours, minutes and seconds; for non-AOC operations, either equipage or carriage is acceptable
- (iii) Pressure altitude;
- (iv) Indicated airspeed, with a means of preventing malfunctioning due to either condensation or icing;
- (v) Turn and slip;
- (vi) Aircraft attitude; and
- (vii) Stabilised aircraft heading, and

Note: The requirements of (v), (vi), and (vii) may be met by combinations of instruments or by integrated flight director systems, provided that the safeguards against total failure, inherent in the three separate instruments, are retained.

- (viii) Whether the supply of power to the gyroscopic instruments is adequate;
- (ix) The outside air temperature;
- (x) Rate-of-climb and descent; and

(2) In addition, for aeroplanes with a maximum certificated take-off mass exceeding 5 700 kg or equipped with one or more turbojet engines—

- (i) An emergency power supply for electrically operated attitude indicating instruments
 - (A) Independent of the main electrical generating system for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the pilot-in-command, and
 - (B) Automatically operative after the total failure of the main electrical generating system and clear indication given on the instrument panel that the attitude indicator(s) is being operated by emergency power; and
- (ii) For aeroplanes with advanced cockpit automation systems (glass cockpits), system redundancy that provides the flight crew with attitude, heading, airspeed and altitude indications in case of failure of the primary system or display; and

(3) Such additional instruments or equipment as may be prescribed by the appropriate authority.

(b) [AOC] All aeroplanes when operated in IFR, or when the aircraft cannot be maintained in a desired altitude without reference to one or more flight instruments, shall be equipped with—

(1) For all aeroplanes:

- (i) A magnetic compass;
- (ii) An accurate timepiece indicating the time in hours, minutes and seconds;
- (iii) Two sensitive pressure altimeters with counter drum-pointer or equivalent presentation:

Note: Neither three-pointer nor drum-pointer altimeters satisfy this requirement.

- (iv) An airspeed indicating system with a means of preventing malfunctioning due to either condensation or icing;
 - (v) A turn and slip indicator aeroplanes or a slip indicator for helicopters;
 - (vi) Attitude indicator (artificial horizon);
 - (vii) A heading indicator (directional gyroscope);

Note: The requirements of items (v), (vi) and (vii) may be met by combinations of instruments or by integrated flight director systems provided that the safeguards against total failure, inherent in the separate instruments are retained;
 - (viii) A means of indicating whether the supply of power to the gyroscopic instruments is adequate;
 - (ix) A means of indicating in the flightcrew compartment the outside air temperature;
 - (x) A rate-of-climb and descent indicator;
- (2) In addition, for aeroplanes with a maximum certificated take-off mass exceeding 5 700 kg—
- (i) An emergency power supply for electrically operated attitude indicating instruments
 - (ii) Independent of the main electrical generating system for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the pilot-in-command, and
 - (iii) Automatically operative after the total failure of the main electrical generating system and clear indication given on the instrument panel that the attitude indicator(s) is being operated by emergency power; and
- (3) Such additional instruments or equipment as may be prescribed by the Authority.
- (c) [AOC] No person may operate an aeroplane under IFR, or under VFR over routes that cannot be navigated by reference to visual landmarks, unless the aeroplane is equipped with navigation equipment in accordance with the requirements of air traffic services in the area(s) of operation.
- (1) [AOC] No person may conduct single pilot IFR operations unless the aeroplane is equipped with an autopilot with at least altitude hold and heading mode.
 - (2) [AAC] No person may operate an aeroplane under IFR unless it is equipped with an audio selector panel accessible to each required flight crewmember.
 - (3) [AOC] No person may conduct single pilot IFR or night operations in commercial air transport operations unless the aeroplane is equipped with a headset with boom microphone or equivalent and a transmit button on the control wheel.
- (d) [AAC] All helicopters, unless otherwise indicated, when operated in IFR, or when the aircraft cannot be maintained in a desired attitude without reference to one or more flight instruments, shall be equipped with—
- (1) All helicopters:
 - (i) A magnetic compass;
 - (ii) The time in hours, minutes and seconds; for non-AOC operations, either equipage or carriage is acceptable.
 - (iii) Pressure altimeter:
 - (A) [AAC] a sensitive pressure altimeter;
 - (B) [AOC] two sensitive pressure altimeters;

Note: Due to the long history of misreadings, the use of drum-pointer altimeters is not recommended.

- (iv) An airspeed indicating system with a means of preventing malfunctioning due to either condensation or icing;
 - (v) A slip indicator;
 - (vi) Attitude indicator (artificial horizon) for each required pilot and one additional attitude indicator;
 - (vii) A heading indicator (directional gyroscope);
 - (viii) A means of indicating whether the supply of power to the gyroscopic instruments is adequate;
 - (ix) A means of indicating in the flightcrew compartment the outside air temperature;
 - (x) A rate-of-climb and descent indicator;
 - (xi) A stabilisation system, unless it has been demonstrated to the satisfaction of the certifying Authority that the helicopter possesses, by nature of its design, adequate stability without such a system; and
- (2) [AOC] An emergency power supply for electrically operated attitude indicating instruments
- (i) Independent of the main electrical generating system for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the pilot-in-command, and
 - (ii) Automatically operative after the total failure of the main electrical generating system and clear indication given on the instrument panel that the attitude indicator(s) is being operated by emergency power; and
- (3) Such additional instruments or equipment as may be prescribed by the Authority.

7.2.1.5 INSTRUMENTS FOR OPERATION AT NIGHT

- (a) [AAC] No person may operate an aeroplane at night unless it is equipped with the following:
- (1) the instruments in 7.2.1.4 appropriate to the aircraft and operation;
 - (2) the lights specified in 7.5:
- (b) [AOC] No person may operate an aeroplane at night unless it is equipped with the following:
- (1) the instruments in 7.2.1.4 appropriate to the aircraft and operation;
 - (2) the lights specified in 7.5.:
- (c) [AAC] No person may operate a helicopter at night unless it is equipped with the following:
- (1) the instruments in 7.2.1.4 appropriate to the aircraft and operation;
 - (2) an attitude indicator (artificial horizon) for each required pilot;
 - (3) a slip indicator;
 - (4) a heading indicator (directional gyroscope);
 - (5) a rate of climb and descent indicator;
 - (6) the lights specified in 7.5:
 - (7) Such additional instruments or equipment as may be prescribed by the Authority.

7.2.1.6 STANDBY ATTITUDE INDICATOR

- (a) [AAC] No person may operate an aeroplane with a maximum certified take-off mass exceeding 5,700 kg or a performance Class 1 or 2 helicopter unless it is equipped with a single standby attitude indicator (artificial horizon) that—
 - (1) operates independently of any other attitude indicating system;
 - (2) is powered continuously during normal operation; and
 - (3) after a total failure of the normal electrical generating system, is automatically powered for a minimum of 30 minutes from a source independent of the normal electrical generating system.
- (b) [AAC] When the standby attitude indicator is being operated by emergency power, it shall be clearly operating and illuminated to the flight crew.
- (c) [AAC] Where the standby attitude indicator has its own dedicated power supply, there shall be an associated indication, either on the instrument or on the instrument panel when this supply is in use.
- (d) [AAC] If the standby attitude instrument system is installed and usable through flight attitudes of 360° of pitch and roll, the turn and slip indicators may be replaced by slip indicators.

7.2.1.7 INSTRUMENTS AND EQUIPMENT FOR CATEGORY II OPERATIONS

The instruments and equipment listed in this subsection shall be installed, approved and maintained in accordance with Appendix APP:7.2.1.7 of this part for each aircraft operated in a Category II operation:

Note: This subsection does not require duplication of instruments and equipment required by 7.2.1.2 or any other provisions of this part.

- (1) Group I is comprised of the following equipment and this equipment must be inspected both within three calendar months of the previous inspection and must also have a bench inspection within 12 months of the previous bench inspection using procedures contained in the approved maintenance program.
 - (i) Two localizer and glide slope receiving systems.

Note: Each system shall provide a basic ILS display and each side of the instrument panel must have a basic ILS display. However, a single localizer antenna and a single glide slope antenna may be used.
 - (ii) A communications system that does not affect the operation of at least one of the ILS systems.
 - (iii) A marker beacon receiver that provides distinctive aural and visual indications of the outer and the middle markers.
 - (iv) Two gyroscopic pitch and bank indicating systems.
 - (v) Two gyroscopic direction indicating systems.
 - (vi) Two airspeed indicators.
 - (vii) Two sensitive altimeters adjustable for barometric pressure, having markings at 20 foot intervals and each having a placarded correction for altimeter scale error and for the wheel height of the aircraft.
 - (viii) One self-monitoring radio altimeter with dual display.
 - (ix) Two vertical speed indicators.
 - (x) A flight control guidance system that consists of either an automatic approach coupler or a flight director system.

Note: A flight director system must display computed information as steering command in relation to an ILS localizer and, on the same instrument, either computed information as pitch command in relation to an ILS glide slope or basic ILS glide slope information. An automatic approach coupler must provide at least automatic steering in relation to an ILS localizer. The flight control guidance system may be operated from one of the receiving systems required by paragraph (1)(i).

- (xi) For Category II operations with decision heights below 150 feet a radio altimeter is required.
- (2) Group II is comprised of the following equipment and this equipment which, with the exception of the static system, does not require special maintenance procedures other than those necessary to retain the original approval condition. Group II equipment must be inspected within 12 months of the previous inspection using procedures contained in the approved maintenance program.
- (i) Warning systems for immediate detection by the pilot of system faults in items (1)(i), (1)(iv), (1)(v) and (1)(x), of Group I.
 - (ii) Dual controls.
 - (iii) An externally vented static pressure system with an alternate static pressure source.
 - (iv) A windshield wiper or equivalent means of providing adequate cockpit visibility for a safe visual transition by either pilot to touchdown and rollout.
 - (v) A heat source for each airspeed system pitot tube installed or an equivalent means of preventing malfunctioning due to icing of the pitot system.

7.2.1.8 INSTRUMENTS AND EQUIPMENT FOR CATEGORY III OPERATIONS

- (a) The instruments and equipment listed in this subsection shall be installed, approved and maintained in accordance with international acceptable criteria and the AFM in each aircraft operated in a Category III operation:

Note: This subsection does not require duplication of instruments and equipment required by 7.2.1.2 and 7.2.1.7 or any other provisions of this part.

- (b) Airborne systems for CAT IIIA minima not less than RVR 175 m. The following equipment in addition to the instrument and navigation equipment required by this Part for IFR flight and CAT II operations is the minimum aircraft equipment required for CAT IIIA:
- (1) A redundant flight control or guidance system demonstrated in accordance with international acceptable criteria. Acceptable flight guidance or control systems include the following—
 - (i) A Fail Operational or Fail Passive automatic landing system as least to touchdown;
 - (ii) A Fail Operational or Fail Passive manual flight guidance system providing suitable head-up or head-down command guidance, and suitable monitoring capability at least to touchdown;
 - (iii) A hybrid system, using automatic landing capability as the primary means of landing at least to touchdown; or
 - (iv) Other system that can provide an equivalent level of performance and safety.
 - (2) An automatic throttle or automatic thrust control system that meets approved criteria as specified in the AFM. However, for operations with a 15 m (50 ft) DH, or other operations that have been specifically evaluated such as for engine inoperative landing capability, automatic throttles may not be required if it has been demonstrated that operations can be safely conducted, with an acceptable work load, without their use.

- (3) At least two independent navigation receivers/sensors providing lateral and vertical position or displacement information, typically with the first pilot's station receiving the information from one and the second pilot's station receiving the information from the other. The navigation receivers/sensors shall meet the criteria specified for CAT IIIA operations.
 - (4) At least two approved radio altimeter systems that meet the performance requirements criteria as specified in the AFM, typically with the first pilot's station receiving information from one and the second pilot's station receiving information from the other.
 - (5) Failure detection, annunciation, and warning capability, as determined acceptable by criteria in the AFM.
 - (6) Missed approach guidance provided by one or more of the following means:
 - (i) Attitude displays that include suitable pitch attitude markings, or a pre-established computed pitch command display.
 - (ii) An approved flight path angle display, or
 - (iii) An automatic or flight guidance go-around capability.
 - (7) Suitable forward and side flight deck visibility for each pilot as specified in the AFM.
 - (8) Suitable windshield rain removal, ice protection, or defog capability as specified in the AFM.
- (c) Airborne systems for CAT IIIB minima less than RVR 175 m but not less than RVR 50 m. The following equipment in addition to the instrument and navigation equipment required by this Part for IFR flight and CAT II and CAT IIIA operations is the minimum aircraft equipment required for CAT IIIB plus the following extra equipment requirements:
- (1) A redundant flight control or guidance system demonstrated in accordance with international acceptable criteria. Acceptable flight guidance or control systems include the following –
 - (i) A Fail Operational landing system with a Fail Operational or Fail Passive automatic rollout system; or
 - (ii) A Fail Passive landing system, limited to touchdown zone RVR not less than RVR 175 m, with Fail Passive rollout provided automatically or by a flight guidance system providing suitable head-up or head-down guidance, and suitable monitoring capability, or
 - (iii) A Fail Operational hybrid automatic landing and rollout system with comparable manual flight guidance system, using automatic landing capability as the primary means of landing; or
 - (iv) Other system that can provide an equivalent level of performance and safety.
 - (2) An automatic throttle or automatic thrust control that meets the appropriate criteria as specified in the AFM. However for operations with a 15 m (50 ft) DH, automatic throttles may not be required if it has been demonstrated that operations can safely be conducted, with an acceptable work load, without their use.
 - (3) At least two independent navigation receivers/sensors providing lateral and vertical position or displacement information, typically with the first pilot's station receiving information from one and the second pilot's station receiving information from the other. The navigation receivers/sensors shall meet the criteria specified in the AFM.
 - (4) At least two approved radio altimeter systems that need the performance criteria outlined in the AFM, typically with the first pilot's station receiving information from one and the second pilot's station receiving information from the other.
 - (5) Failure detection, annunciation and warning capability as specified in the AFM.

- (6) Missed approach guidance provided by one or more of the following means:
 - (i) Attitude displays that include calibrated pitch attitude markings, or a pre-established computed pitch command display; or
 - (ii) An approved flight path angle display, or
 - (iii) An automatic or flight guidance go-around capability.
 - (7) Suitable forward and side flight deck visibility for each pilot, as specified in the AFM.
 - (8) Suitable windshield rain removal, ice protection, or defog capability as specified in the AFM.
- (d) Airborne systems for CAT IIIC minima less than RVR 75 m (300 ft). The following equipment in addition to the instrument and navigation equipment required by this Part for IFR flight and CAT II, CAT IIIA and CAT IIIB operations is the minimum aircraft equipment required for CAT IIIC:
- (1) A Fail Operational Automatic Flight Control System, or manual flight guidance system designed to meet fail operational system criteria, or a hybrid system in which both the fail-passive automatic system and the monitored manual flight guidance components provide approach and flare guidance to touchdown, and in combination provide full fail operational capability, and
 - (2) A fail operational automatic, manual, or hybrid rollout control system.

7.2.1.9 AEROPLANES EQUIPPED WITH AUTOMATIC LANDING SYSTEMS, A HEAD-UP DISPLAY (HUD) OR EQUIVALENT DISPLAYS, ENHANCED VISION SYSTEMS (EVS), SYNTHETIC VISION SYSTEMS (SVS) AND/OR COMBINED VISION SYSTEMS (CVS)

- (a) Where aircraft are equipped with automatic landing systems, a HUD or equivalent displays, EVS, SVS or CVS, or any combination of those systems into a hybrid system, the use of such systems for the safe operation of an aircraft shall be approved by the State of the Operator.

Note.— Information regarding a HUD or equivalent displays, including references to RTCA and EUROCAE documents, is contained in the Manual of All-Weather Operations (Doc 9365).
- (b) In approving the operational use of automatic landing systems, a HUD or equivalent displays, EVS, SVS or CVS, the State of the Operator shall ensure that:
 - (1) the equipment meets the appropriate airworthiness certification requirements;
 - (2) the operator has carried out a safety risk assessment of the operations supported by the automatic landing systems, a HUD or equivalent displays, EVS, SVS or CVS;
 - (3) the operator has established and documented the procedures for the use of, and training requirements for, automatic landing systems, a HUD or equivalent displays, EVS, SVS or CVS.

7.3 COMMUNICATIONS EQUIPMENT

7.3.1.1 RADIO EQUIPMENT

- (a) [AAC] No person may operate an aircraft unless it is equipped with radio communication equipment required for the kind of operation being conducted.
- (b) [AAC] All aircraft operated in VFR as a controlled flight, in IFR, at night, extended flight over water, or over land designated by the Authority as especially difficult for search and rescue, shall be equipped with radio communication equipment—
 - (1) Capable of conducting two-way communication for aerodrome control purposes;
 - (2) Capable of conducting two-way communication at any time during flight with at least one aeronautical station and with such other aeronautical stations;

- (3) Capable of conducting communications on those frequencies prescribed by the Authority;
 - (4) Capable of receiving meteorological information at any time during the flight;
 - (5) Capable of conducting communications on the aeronautical emergency frequency 121.5 MHz;
 - (6) Approved and installed in accordance with the requirements applicable to them, including the minimum performance requirements;
 - (7) Installed such that the failure of any single unit required for communication equipment, will not result in the failure of another unit required for communications purposes; and
 - (8) Meeting any other requirements as prescribed by the Authority.
- (c) [AOC] No person may operate an aircraft in commercial air transport operations, or as otherwise specified by the Authority, unless it is equipped with two independent radio communications systems, appropriate to the route and airspace used.
- (d) [AAC] For operations where communication equipment is required to meet an RCP specification for performance-based communication (PBC) , an aircraft shall, in addition to the requirements specified in 7.3.1.1 (a), (b) and (c):
- (1) be provided with communication equipment which will enable it to operate in accordance with the prescribed RCP specification(s);
 - (2) have information relevant to the aircraft RCP specification capabilities listed in the flight manual or other aeroplane documentation approved by the State of Design or State of Registry; and
 - (3) have information relevant to the aircraft RCP specification capabilities included in the MEL.
- (e) [AOC] No person may operate an aircraft in commercial air transport operations unless it is equipped with a high frequency (HF) communication system.
- (f) [AOC] When more than one communications equipment unit is required, each shall be independent of the other or others to the extent that a failure in any one will not result in failure of any other.
- (g) [AOC] No person may operate an aircraft in commercial air transport operations unless it is equipped with a boom or throat microphone available at each required flight crew member flight duty station.

7.3.1.2 FLIGHTCREW AND CREW MEMBER INTERPHONE SYSTEM FOR AEROPLANES

- (a) [AOC] No person may operate an aeroplane in commercial air transport operations on which a flight crew of more than one is required unless it is equipped with a flight crew interphone system, including headsets and microphones, not of a handheld type, for use by all members of the flight crew.
- (b) [AOC] No person may operate an aeroplane in commercial air transport operations with a maximum certified take-off mass exceeding 15,000 kg, or having an approved passenger seating capacity of 19 or more, or having a flight crew compartment door, unless it is equipped with a crew member interphone system that—
- (1) Operates independently of the public address system except for handsets, headsets, microphones, selector switches and signalling devices.
 - (2) Provides a means of two-way communication between the flight crew compartment and each—
 - (i) Passenger compartment;
 - (ii) Galley located other than on a passenger deck level; and
 - (iii) Remote crew compartment that is not on the passenger deck and is not easily accessible from a passenger compartment.
 - (3) Is readily accessible for use—
 - (i) From each of the required flight crew stations in the flight crew compartment; and

- (ii) At required cabin crew member stations close to each separate or pair of floor level emergency exits.
- (4) Has an alerting system incorporating aural or visual signals for use by flight crewmembers to alert the cabin crew and for use by cabin crewmembers to alert the flight crew in the event of suspicious activity or security breaches in the cabin.
- (5) Has a means for the recipient of a call to determine whether it is a normal call or an emergency call.
- (6) Provides on the ground a means of two-way communication between ground personnel and at least two flight crew members.

7.3.1.3 PUBLIC ADDRESS SYSTEM – AOC HOLDERS

- (a) [AOC] No AOC holder may operate a passenger carrying aeroplane with a maximum approved passenger seating configuration of more than 19 unless a public address system is installed that—
 - (1) Operates independently of the interphone systems except for handsets, headsets, microphones, selector switches and signalling devices.
 - (2) Be readily accessible for immediate use from each required flight crew member station.
 - (3) For each required floor level passenger emergency exit which has an adjacent cabin crew seat, has a microphone which is readily accessible to the seated cabin crew member, except that one microphone may serve more than one exit, provided the proximity of the exits allows unassisted verbal communication between seated cabin crew members.
 - (4) Is capable of operation within 10 seconds by a cabin crew member at each of those stations in the compartment from which its use is accessible.
 - (5) Is audible and intelligible at all passenger seats, toilets, and cabin crew seats and workstations.
- (b) [AOC] No AOC holder may operate a passenger carrying helicopter with a maximum approved passenger seating configuration of more than 19 unless a public address system is installed that—
 - (1) Operates independently of the interphone systems except for handsets, headsets, microphones, selector switches and signalling devices.
 - (2) Be readily accessible for immediate use from each required flight crew member station.
 - (3) For each required floor level passenger emergency exit which has an adjacent cabin crew seat, has a microphone which is readily accessible to the seated cabin crew member, except that one microphone may serve more than one exit, provided the proximity of the exits allows unassisted verbal communication between seated cabin crew members.
 - (4) Is capable of operation within 10 seconds by a cabin crew member at each of those stations in the compartment from which its use is accessible.
 - (5) Is audible and intelligible at all passenger seats, toilets, and cabin crew seats and workstations.
 - (6) Following a total failure of the normal electrical generating system, provide reliable operation for a minimum of 10 minutes.
- (c) [AOC] No AOC holder may operate a passenger carrying helicopter with a maximum approved passenger seating configuration of more than 9 but less than 19 without a public address system installed unless—
 - (1) The helicopter is designed without a bulkhead between pilot and passengers; and
 - (2) The operator is able to demonstrate in a manner acceptable to the Authority that when in flight, the pilot's voice is audible and intelligible at all passenger seats.

7.3.1.4 MICROPHONES

- (a) Equipage. No person may operate the following aircraft or in the following conditions unless the aircraft is equipped with a boom or throat microphone available at each required flight crew member flight duty station
 - (1) [AAC] Any aeroplane in IFR conditions;
 - (2) [AOC] Any aeroplane in commercial air transport operations;
 - (3) [AAC] Any helicopter.
- (b) Usage. All flight crew members required to be on flight deck duty shall communicate through boom or throat microphones under the following operations or conditions:
 - (1) [AAC] During IFR operations;
 - (2) [AOC] Below the transition level/altitude;
 - (3) [AAC] At all times.

7.4 NAVIGATION EQUIPMENT

7.4.1.1 NAVIGATION EQUIPMENT—GENERAL

- (a) [AAC] No person may operate an aircraft unless it is equipped with navigation equipment that will enable it to proceed in accordance with—
 - (1) It's operational flight plan; and
 - (2) The requirements of air traffic services.
- (b) No person may operate flights in defined portions of airspace, including MNPS, RVSM, or any other routes where a navigation specification for performance-based navigation (PBN) has been prescribed unless it—
 - (1) Has received authorisation by the Department of Civil Aviation, Myanmar for such operations;
 - (2) Is equipped with the navigation equipment to enable it to operate in accordance with the prescribed navigation specification(s); and
 - (3) Is equipped with navigation equipment that continuously provides information to the flightcrew of adherence to or departure from track with respect to the required degree of accuracy at any point along that track.
- (c) No person may operate an aircraft unless it has sufficient navigation equipment that will enable the aircraft to navigate in accordance with paragraphs (a) and (b) above, such that—
 - (1) In the event of the failure of any piece of navigation equipment at any stage of flight, the remaining equipment will enable the aircraft to continue to navigate; and
 - (2) The failure of any single unit required for either communications or navigation purposes or both will not result in the failure of another unit required for communications or navigation purposes.
- (d) The equipment requirements in paragraph (a) does not apply in instances where the Authority has authorised VFR by visual reference to landmarks.
- (e) [AAC] No person may operate an aeroplane under IFR, or under VFR over routes that cannot be navigated by reference to visual landmarks, unless the aeroplane is equipped with navigation equipment in accordance with the requirements of air traffic services in the area(s) of operation.
- (f) [AAC] All aircraft intended to land in IMC or at night shall be provided with radio navigation equipment capable of receiving signals providing guidance to—
 - (1) A point from which a visual landing can be effected; or

- (2) Each aerodrome at which it is intended to land in IMC; and
- (3) Any designated alternate aerodromes.

7.4.1.2 MNPS

- (a) [AAC] No person may operate an aeroplane in MNPS airspace unless it is equipped with navigation equipment that-
 - (1) Continuously provides indications to the flightcrew of adherence to or departure from track to the required degree of accuracy at any point along that track; and
 - (2) Has been authorised by the Department of Civil Aviation, Myanmar for MNPS operations concerned through either operations specifications for AOC holders or letter of authorisation for general aviation.
- (b) [AAC] The navigation equipment required for operations in MNPS airspace shall be visible and usable by either pilot seated at his duty station.
- (c) [AAC] For unrestricted operation in MNPS airspace an aeroplane shall be equipped with two independent Long-Range Navigation Systems (LRNS).
- (d) [AAC] For operation in MNPS airspace along notified special routes, an aeroplane shall be equipped with one LRNS, unless otherwise specified.

7.4.1.3 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)

- (a) [AAC] For flights in defined portions of airspace where, based on Regional Air Navigation Agreement, a reduced vertical separation minimum (RVSM) of 300 m (1,000 ft) is applied between FL 290 and FL 410 inclusive, an aeroplane:
 - (1) Shall be fitted the minimum equipment as follows:
 - (i) Two independent altitude measurement systems;
 - (ii) An automatic altitude control system;
 - (iii) An altitude alerting system and the threshold for the alert shall not exceed $\pm 90\text{m}$ (300ft);
 - (iv) One secondary surveillance radar (SSR) altitude reporting transponder. If only one is fitted, it should have the capability for switching to operate from either altitude measurement system and
 - (2) By means of the equipment mentioned in above paragraph (1), shall be capable of
 - (i) Indicating to the flightcrew the flight level being flown;
 - (ii) Automatically maintaining a selected flight level;
 - (iii) Providing an alert to the flightcrew when a deviation occurs from the selected flight level. The threshold for the alert shall not exceed + or - 90 m (300 ft); and
 - (iv) Automatically reporting pressure-altitude and
 - (3) Shall be authorised for operations in the airspace concerned by –
 - (i) The State of Operator for AOC holders through operations specifications, or
 - (ii) The State of Registry for non-AOC holders through letter of authorisation.
 - (4) Shall satisfy the demonstration requirements specified in APP; 7.4.1.3 as to the altimetry system performance requirements for vertical navigation performance capability
- (b) Prior to granting an RVSM approval required by paragraph (a)(3), the State of Operator for AOC holders and the State of Registry for non-AOC holders shall be satisfied that:
 - (1) The vertical navigation performance capability of the aeroplane satisfies the requirements specified in Appendix APP: 7.4.1.3.

- (2) The operator has instituted appropriate procedures in respect of continued airworthiness (maintenance and repair) practices and programmes; and
 - (3) The operator has instituted appropriate flight crew procedures for operations in RVSM airspace.
- (c) The State of Operator in consultation with the State of Registry, if appropriate, shall ensure that, in respect of those aeroplanes mentioned in item (a)(3) above, adequate provisions exist for:
- (1) Receiving the reports of height-keeping performance issued by the monitoring agencies established in accordance with Annex 11; and
 - (2) Taking immediate corrective action for individual aircraft, or aircraft type groups, identified in such reports as not complying with the height-keeping requirements for operations in airspace where RVSM is applied.
- (d) An operator with RVSM approval shall ensure that a minimum of two aeroplanes of each aircraft type grouping of the operator have their height-keeping performance monitored, at least once every two years or within intervals of 1 000 flight hours per aeroplane, whichever period is longer. If an operator aircraft type grouping consists of a single aeroplane, monitoring of that aeroplane shall be accomplished within the specified period.
- (e) An operator shall ensure that each aeroplane shall be sufficiently provided with navigation equipment to ensure that, in the event of the failure of one item of equipment at any stage of the flight, the remaining equipment will enable the aeroplane to navigate in accordance with paragraphs (a), (b) and (c) of 7.4.1.3.
- (f) The Authority will take appropriate action in respect of aircraft and operators found to be operating in RVSM airspace in Republic of the Union of Myanmar without a valid RVSM approval.

Note: These provisions and procedures need to address both the situation where the aircraft in question is operating without approval in the airspace of the State, and the situation where an operator for which the State has regulatory oversight responsibility is found to be operating without the required approval in the airspace of another State.

7.4.1.4 ELECTRONIC NAVIGATION DATA MANAGEMENT

[AAC] No person shall employ electronic navigation data products that have been processed for application in the air and on the ground unless the Authority has approved:

- (1) The operator's procedures for ensuring that the process applied and the products delivered have acceptable standards of integrity and that the products are compatible with the intended function of the equipment that will use them;
- (2) The operator's program for continual monitoring of both process and products; and
- (3) The operator's procedures to ensure the timely distribution and insertion of current and unaltered electronic navigation data to all aircraft that require it.

7.4.1.5 ALTITUDE REPORTING TRANSPONDER

- (a) [AAC] No person may operate an aircraft in airspace that requires a pressure reporting transponder unless that equipment is operative.
- (b) [AAC] No person may operate an aircraft at altitudes above FL 290 unless it is equipped with a system that is automatically reporting pressure altitudes.
- (c) [AAC] No person may operate an aeroplane or helicopter unless it is equipped with an operative pressure-altitude reporting transponder that operates in accordance with the requirements of Myanmar air traffic services and the relevant provisions of ICAO Annex 10, Volume IV.

- (d) [AOC] No person may operate an aeroplane unless it is equipped with a data source that provides pressure-altitude information with a resolution of 7.62 m (25 ft), or better.
- (e) [AOC] No person may operate an aeroplane that is equipped with an automatic means of detecting airborne/on-the-ground status unless it is equipped with a Mode S transponder.

7.5 AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION

7.5.1.1 REQUIRED AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION

- (a) [AAC] All aircraft operated at night by, shall be equipped with:
 - (1) A landing light;
 - (2) Navigation/position lights;
 - (3) Illumination for all flight instruments and equipment that are essential for the safe operation of the aircraft;
 - (4) Lights in all passenger compartments; and
 - (5) A flashlight for each crew member station (approval not required).
- (b) All aircraft type certificated with aviation red or aviation white anti-collision system shall have the anti-collision system operative in both day and night. In the event of the failure of any light of the anti-collision light system, operation of the aircraft may continue to a location where repairs or replacement can be made.

7.5.1.2 REQUIRED AIRCRAFT LIGHTS AND INSTRUMENT ILLUMINATION FOR COMMERCIAL AIR TRANSPORT OPERATIONS

[AOC] No person may operate an aircraft in commercial air transport operations unless it is equipped with:

- (1) Two landing lights or a single light having two separately energized filaments;
- (2) An anti-collision light system;
- (3) Illumination for all flight instruments and equipment that are essential for the safe operation of the aircraft;
- (4) Lights in all passenger compartments;
- (5) Emergency lighting system in the passenger compartments to facilitate evacuation of the aircraft in the event of failure of the lights specified in paragraph (4) of this section;
- (6) A flashlight for each crew member station;
- (7) Navigation/position lights; and
- (8) Lights to conform to the International regulations for preventing collisions at sea if the aircraft is a seaplane or an amphibian aircraft.
- (9) For helicopters — a landing light that is trainable, at least in the vertical plane.

7.6 ENGINE INSTRUMENTS

7.6.1.1 ENGINE INSTRUMENTS

- (a) [AAC] Unless the Authority allows or requires different instrumentation for turbine engine powered aeroplanes to provide equivalent safety, no person may operate any powered aircraft without the following engine instruments:
 - (1) A means for indicating fuel quantity in each fuel tank to be used.

- (2) An oil pressure indicator for each engine.
 - (3) An oil temperature indicator for each engine.
 - (4) A manifold pressure indicator for each altitude engine.
 - (5) A tachometer for each engine.
- (b) [AOC] Unless the Authority allows or requires different instrumentation for turbine engine powered aeroplanes to provide equivalent safety, in addition to the listed equipment requirements in paragraph (a), no person may operate any powered aircraft without the following engine instruments:
- (1) A carburettor air temperature indicator for each piston engine.
 - (2) A cylinder head temperature indicator for each air-cooled piston engine.
 - (3) Coolant temperature indicator for each liquid-cooled piston engine to indicate its coolant-outlet temperature.
 - (4) Ignition switch for each ignition circuit on each piston engine.
 - (5) A fuel pressure indicator for each engine.
 - (6) A fuel flow meter or fuel mixture indicator for each engine not equipped with an automatic altitude mixture control;
 - (7) An oil quantity indicator for each oil-tank when a transfer or separate oil reserve supply is used.
 - (8) An independent fuel pressure warning device for each engine or a master warning device for all engines with a means for isolating the individual warning circuits from the master warning device.
 - (9) Jet pipe temperature indicators or equivalent for each turbine engine, to indicate whether the temperature of the exhaust gas is maintained within its limitations.
 - (10) For aircraft equipped with turbine engines and aircraft equipped with four or more power units, irrespective of the type of engine, a device warning the pilot immediately of any change in power output of the power units and indicating to him at the same time which engine is at fault.
 - (11) Additional requirements that will be required if these are necessary to enable compliance in operation with limitations established during engine type test.
 - (12) A device for each reversible propeller, to indicate to the pilot when the propeller is in reverse pitch, which complies with the following:
 - (i) The device may be actuated at any point in the reversing cycle between the normal low pitch stop position and full reverse pitch, but it may not give an indication at or above the normal low pitch stop position.
 - (ii) The source of indication shall be actuated by the propeller blade angle or be directly responsive to it.

7.7 WARNING INSTRUMENTS AND SYSTEMS

7.7.1.1 MACH NUMBER INDICATOR

[AAC] All aircraft with speed limitations expressed in terms of Mach number shall be equipped with a Mach number indicator.

7.7.1.2 LOSS OF PRESSURISATION INDICATOR

[AAC] All pressurized aircraft intended to be operated at flight altitudes, above (25,000 feet) or at which the atmospheric pressure is less than 376 hPa, shall be equipped with a device to provide positive warning to the flight crew of any dangerous loss of pressurization.

7.7.1.3 LANDING GEAR INDICATOR POSITION AND AURAL WARNING DEVICE

- (a) [AAC] Each powered civil aircraft with retractable landing gear shall have a landing gear position indicator.
- (b) [AOC] Each aeroplane with retractable landing gear shall have an aural warning device that functions continuously under the following conditions:
 - (1) For aeroplanes with an established approach wing-flap position, whenever the wing flaps are extended beyond the maximum certified approach climb configuration position in the Aeroplane Flight Manual and the landing gear is not fully extended and locked.
 - (2) For aeroplanes without an established approach climb wing-flap position, whenever the wing flaps are extended beyond the position at which landing gear extension is normally performed and the landing gear is not fully extended and locked.
- (c) [AOC] The warning system required by paragraph (b) of this section:
 - (1) May not have a manual shutoff;
 - (2) Shall be in addition to the throttle-actuated device installed under the type certification airworthiness requirements; and
 - (3) May utilize any part of the throttle-actuated system including the aural warning device.
- (d) [AOC] The flap position-sensing unit required in paragraph (b) may be installed at any suitable place in the aeroplane.

7.7.1.4 ALTITUDE ALERTING SYSTEM

- (a) [AAC] No person may operate a turbine powered aeroplane with a maximum certified take-off mass in excess of 5,700 kg or having a maximum approved passenger seating configuration of more than 9 seats, or a turbojet powered aeroplane, unless it is equipped with an altitude alerting system capable of—
 - (1) Alerting the flight crew upon approaching preselected altitude in either ascent or descent; and
 - (2) Alerting the flight crew by at least an aural signal, when deviating above or below a preselected altitude.
- (b) [AAC] For operations in defined portions of airspace where, based on Regional Air Navigation Agreement, a reduced vertical separation minimum (RVSM) of 300 m (1,000 ft) is applied between FL 290 and FL 410 inclusive, an aircraft shall be provided with equipment that is capable of providing an alert to the flight crew when a deviation occurs from the selected flight level. The threshold for the alert shall not exceed ± 90 m (300 ft).

7.7.1.5 GROUND PROXIMITY WARNING SYSTEM

- (a) [AAC] No operator may operate a turbine-powered aeroplane, or piston-engined aeroplane of a maximum certificated take-off mass in excess of 5,700 kg or authorized to carry more than 9 passengers, unless it is equipped with a ground proximity warning system that has a forward looking terrain avoidance function.
- (b) [AAC] Each ground proximity warning system shall automatically provide, by means of aural signals which may be supplemented by visual signals, timely and distinctive warning to the flight crew when the aeroplane is in potentially hazardous proximity to the earth's surface.
- (c) [AAC] A ground proximity warning system shall provide, unless otherwise specified herein, warnings of the following circumstances:-
 - (1) Excessive descent rate.
 - (2) Excessive terrain closure rate.
 - (3) Excessive altitude loss after take-off or go-around.

- (4) Unsafe terrain clearance while not in landing configuration;
 - (i) Gear not locked down;
 - (ii) Flaps not in a landing position; and
 - (5) Excessive descent below the instrument glide path.
- (d) [AAC] All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less and authorized to carry more than 5 but not more than 9 passengers shall be equipped with a ground proximity warning system which provides the warnings of 7.7.1.5 (c) (1) and (3), warning of unsafe terrain clearance and a forward looking terrain avoidance function.

7.7.1.6 WEATHER RADAR

- (a) [AOC] No person may operate an aeroplane in commercial air transport in an area where thunderstorms or other potentially hazardous weather conditions may be expected unless it is equipped with a weather radar.
- (b) [AOC] No person may operate a helicopter in commercial air transport when carrying passengers in an area where thunderstorms or other potentially hazardous weather conditions may be expected unless it is equipped with a weather radar.

7.7.1.7 AIRBORNE COLLISION AVOIDANCE SYSTEM (ACAS)

- (a) [AOC] No person may operate a turbine powered aeroplane with a maximum certificated takeoff mass in excess of 5700 kg or authorized to carry more than 19 passengers, unless it is equipped with an airborne collision avoidance system (ACAS II).
- (b) [AAC] All aeroplanes engaged in international navigation shall be equipped with an airborne collision avoidance system (ACAS II).
- (c) [AAC] No person may operate a turbine engine aeroplane for which the individual airworthiness certificate was first issued after 24 November 2005 with a maximum certificated take-off mass in excess of 15,000 kg or authorised to carry more than 30 passengers, unless it is equipped with an ACAS II.
- (d) [AAC] No person may operate a turbine engine aeroplane for which the individual airworthiness certificate was first issued after 1 January 2008 with a maximum certificated take-off mass in excess of 5,700 kg but not exceeding 15,000 kg or authorised to carry more than 19 passengers, unless it is equipped with an ACAS II.
- (e) [AAC] An airborne collision avoidance system shall operate in accordance with the relevant provisions of ICAO Annex 10, Volume IV.
- (f) [AAC] Each person operating an aircraft equipped with an airborne collision avoidance system shall have that system on and operating.

7.7.1.8 FORWARD LOOKING WIND SHEAR WARNING SYSTEM—TURBOJET AEROPLANES

- (a) [AOC] All turbojet aeroplanes of a maximum certificated takeoff mass in excess of 5700 kg or authorised to carry more than nine passengers should be equipped with a forward-looking wind shear warning system.
- (b) [AOC] The system should be capable of providing the pilot with a timely aural and visual warning of wind shear ahead of the aircraft and the information required to permit the pilot to safely commence and continue a missed approach or go-around or to execute an escape manoeuvre if necessary.
- (c) [AOC] The system should also provide an indication to the pilot when the limits specified for the certification of automatic landing equipment are being approached, when such equipment is in use.

7.8 FLIGHT RECORDERS

7.8.1 FLIGHT RECORDERS SYSTEMS

- (a) Crash-protected flight recorders, for both aeroplanes and helicopters, comprise one or more of the following systems:
- (1) A flight data recorder (FDR);
 - (2) A cockpit voice recorder (CVR);
 - (3) An airborne image recorder (AIR) for flight crew-machine interface recordings; and/or
 - (4) A data-link recorder (DLR).
- Note: Image and data link information may be recorded on either the CVR or the FDR.*
- (b) Lightweight flight recorders for aeroplanes comprise one or more of the following systems:
- (1) An aircraft data recording system (ADRS);
 - (2) A cockpit audio recording system (CARS);
 - (3) An airborne image recording system (AIRS); and/or
 - (4) A data link recording system (DLRS).
- Note: Image and data link information may be recorded on either the CARS or the ADRS.*
- (c) Combination recorders (FDR/CVR) may be used to meet the equipage requirements for helicopters.
- (d) Specifications applicable to crash-protected flight recorders are contained in the EUROCAE ED-112, ED-112A, Minimum Operational Performance Specification (MOPS), or equivalent documents.
- (e) Specifications applicable to lightweight flight recorders are contained in EUROCAE ED-155, Minimum Operational Performance Specification (MOPS), or equivalent documents.

7.8.1.1 FLIGHT DATA RECORDERS (FDR) AND AIRCRAFT DATA RECORDING SYSTEMS (ADRS)

- (a) [AAC] All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less for which the application for type certification is submitted to a Contracting State on or after 1 January 2016 shall be equipped with:
- (1) an FDR which shall record at least the first 16 parameters listed in Table A-1 of Appendix APP: 7.8.1.1; or
 - (2) a Class C AIR or AIRS which shall record at least the flight path and speed parameters displayed to the pilot(s), or
 - (3) an ADRS which shall record at least the first 7 parameters listed in Table A-3 of Appendix APP: 7.8.1.1.
- Note. "The application for type certification is submitted to a Contracting State" refers to the date of application of the original "Type Certificate" for the aeroplane type, not the date of certification of particular aeroplane variants or derivative models.*
- (b) [AOC] All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less for which the individual certificate of airworthiness is first issued on or after 1 January 2016 shall be equipped with:
- (1) an FDR which shall record at least the first 16 parameters listed in Table A-1 of Appendix APP: 7.8.1.1; or
 - (2) a Class C AIR or AIRS which shall record at least the flight path and speed parameters displayed to the pilot(s), or
 - (3) an ADRS which shall record at least the first 7 parameters listed in Table A-3 of Appendix APP: 7.8.1.1.

- (c) [AAC] All aeroplanes of a maximum certificated take-off mass of over 27 000 kg for which the individual certificate of airworthiness is first issued on or after 1 January 1989 shall be equipped with an FDR which shall record at least the first 32 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (d) [AAC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, up to and including 27 000 kg, for which the individual certificate of airworthiness is first issued on or after 1 January 1989, shall be equipped with an FDR which shall record at least the first 16 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (e) [AOC] All multi-engined turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less for which the individual certificate of airworthiness is first issued on or after 1 January 1990 shall be equipped with an FDR which shall record at least the first 16 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (f) [AOC] All turbine-engined aeroplanes, for which the individual certificate of airworthiness was first issued before 1 January 1989, with a maximum certificated take-off mass of over 5 700 kg, except those in (h), shall be equipped with an FDR which shall record at least the first 5 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (g) [AOC] All turbine-engined aeroplanes, for which the individual certificate of airworthiness was first issued on or after 1 January 1987 but before 1 January 1989, with a maximum certificated take-off mass of over 5 700 kg, except those in (h), shall be equipped with an FDR which shall record at least the first 9 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (h) [AOC] All turbine-engined aeroplanes, for which the individual certificate of airworthiness was first issued on or after 1 January 1987 but before 1 January 1989, with a maximum certificated take-off mass of over 27 000 kg that are of types of which the prototype was certificated by the appropriate national authority after 30 September 1969 shall be equipped with an FDR which shall record at least the first 16 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (i) [AOC] All turbine-engined aeroplanes, for which the individual certificate of airworthiness was first issued before 1 January 1987, with a maximum certificated take-off mass of over 27 000 kg that are of types of which the prototype was certificated by the appropriate national authority after 30 September 1969 shall be equipped with an FDR which shall record, in addition to the first 5 parameters listed in Table A-1 of Appendix APP: 7.8.1.1, such additional parameters as are necessary to meet the objectives of determining:
 - (1) the attitude of the aeroplane in achieving its flight path; and
 - (2) the basic forces acting upon the aeroplane resulting in the achieved flight path and the origin of such basic forces.
- (j) [AAC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg for which the individual certificate of airworthiness is first issued after 1 January 2005 shall be equipped with an FDR which shall record at least the first 78 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (k) [AAC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg for which the application for type certification is submitted to a Contracting State on or after 1 January 2023 or the individual certificate of airworthiness is first issued on or after 1 January 2023 shall be equipped with an FDR capable of recording at least the 82 parameters listed in Table A-1 of Appendix APP: 7.8.1.1.
- (l) [AAC] All helicopters of a maximum certificated take-off mass of over 3 175 kg for which the individual certificate of airworthiness is first issued on or after 1 January 2016 shall be equipped with an FDR which shall record at least the first 48 parameters listed in Table A-4 of Appendix APP: 7.8.1.1.
- (m) [AAC] All helicopters of a maximum certificated take-off mass of over 7 000 kg, or having a passenger seating configuration of more than nineteen, for which the individual certificate of airworthiness is first issued on or after 1 January 1989 shall be equipped with an FDR which shall record at least the first 30 parameters listed in Table A-4 of Appendix APP: 7.8.1.1.

- (n) [AAC] All helicopters of a maximum certificated take-off mass of over 3 175 kg, up to and including 7 000 kg, for which the individual certificate of airworthiness is first issued on or after 1 January 1989, shall be equipped with an FDR which should record at least the first 15 parameters listed in Table A-4 of Appendix APP: 7.8.1.1.
- (o) [AOC] All turbine-engined helicopters of a maximum certificated take-off mass of over 2 250 kg, up to and including 3 175 kg for which the application for type certification was submitted to a Contracting State on or after 1 January 2018 shall be equipped with:
 - (1) an FDR which shall record at least the first 48 parameters listed in Table A-4 of Appendix APP: 7.8.1.1.; or
 - (2) a Class C AIR or AIRS which shall record at least the flight path and speed parameters displayed to the pilot(s), as defined in, Table A-5 of Appendix APP: 7.8.1.1.; or
 - (3) an ADRS which shall record the first 7 parameters listed in Table A-5 of Appendix APP: 7.8.1.1.

Note. "The application for type certification is submitted to a Contracting State" refers to the date of application of the original "Type Certificate" for the helicopter type, not the date of certification of particular helicopter variants or derivative models.

- (p) [AOC] All helicopters of a maximum certificated take-off mass of 3 175 kg or less for which the individual certificate of airworthiness is first issued on or after 1 January 2018 shall be equipped with:
 - (1) an FDR which shall record at least the first 48 parameters listed in Table A-4 of Appendix APP: 7.8.1.1; or
 - (2) a Class C AIR or AIRS which should record at least the flight path and speed parameters displayed to the pilot(s), as defined in Table A-5 of Appendix APP: 7.8.1.1; or
 - (3) an ADRS which should record the first 7 parameters listed in Table A-5 of Appendix APP: 7.8.1.1.
- (q) [AOC] All helicopters of a maximum certificated take-off mass of over 3 175 kg for which the application for type certificate is submitted to a Contracting State on or after 1 January 2023 or the individual certificate of airworthiness is first issued on or after 1 January 2023 shall be equipped with an FDR capable of recording at least the first 53 parameters listed in Table A-4 of Appendix APP: 7.8.1.1.

(r) **Recording Technology**

FDRs, ADRS, AIRs or AIRS shall not use engraving metal foil, frequency modulation (FM), photographic film or magnetic tape.

(s) **Duration**

- (1) All FDRs installed on aeroplanes shall retain the information recorded during at least the last 25 hours of their operation, with the exception of those installed on aeroplanes referenced in 7.8.1.1 (e) for which the FDR shall retain the information recorded during at least the last 30 minutes of its operation, and, in addition, sufficient information from the preceding take-off for calibration purposes.
- (2) All FDRs installed on helicopters shall retain the information recorded during at least the last 10 hours of their operation.

7.8.1.2 COCKPIT VOICE RECORDERS AND COCKPIT AUDIO RECORDING SYSTEMS

- (a) [AOC] All turbine-engined aeroplanes of a maximum certificated take-off mass of over 2 250 kg, up to and including 5 700 kg, for which the application for type certification is submitted to a Contracting State on or after 1 January 2016 and required to be operated by more than one pilot shall be equipped with either a CVR or a CARS.

- (b) [AAC] All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less for which the individual certificate of airworthiness is first issued on or after 1 January 2016 and required to be operated by more than one pilot shall be equipped with either a CVR or a CARS.
- (c) [AOC] All aeroplanes of a maximum certificated take-off mass of over 5 700 kg for which the individual certificate of airworthiness is first issued on or after 1 January 1987 shall be equipped with a CVR.
- (d) [AOC] All turbine-engined aeroplanes, for which the individual certificate of airworthiness was first issued before 1 January 1987, with a maximum certificated take-off mass of over 5 700 kg that are of types of which the prototype was certificated by the appropriate national authority after 30 September 1969 shall be equipped with a CVR.
- (e) [AAC] All helicopters of a maximum certificated take-off mass of over 7 000 kg shall be equipped with a CVR. For helicopters not equipped with an FDR, at least main rotor speed shall be recorded on the CVR.
- (f) [AAC] All helicopters of a maximum certificated take-off mass of over 3 175 kg for which the individual certificate of airworthiness is first issued on or after 1 January 1987 shall be equipped with a CVR. For helicopters not equipped with an FDR, at least main rotor speed shall be recorded on the CVR.
- (g) The CVR, and CARS as applicable to aeroplanes, shall start to record prior to the aircraft moving under its own power and record continuously until the termination of the flight when the aircraft is no longer capable of moving under its own power.
- (h) In addition to (g) above, the CVR and CARS shall start to record as early as possible during the cockpit checks prior to engine start at the beginning of the flight until the cockpit checks immediately following engine shutdown at the end of the flight.
- (i) The CVR shall record simultaneously on four separate channels, or more, at least the following:
 - (1) voice communication transmitted from or received in the aeroplane by radio;
 - (2) aural environment on the flight deck;
 - (3) voice communication of flight crew members on the flight deck using the aeroplane's interphone system, if installed;
 - (4) voice or audio signals identifying navigation or approach aids introduced in the headset or speaker; and
 - (5) voice communication of flight crew members using the passenger address system, if installed.
- (j) The preferred CVR audio allocation should be as follows:
 - (1) pilot-in-command audio panel;
 - (2) co-pilot audio panel;
 - (3) additional flight crew positions and time reference; and
 - (4) cockpit area microphone.
- (k) The CARS shall record simultaneously on two separate channels, or more, at least the following:
 - (1) voice communication transmitted from or received in the aeroplane by radio;
 - (2) aural environment on the flight deck; and
 - (3) voice communication of flight crew members on the flight deck using the aeroplane's interphone system, if installed.
- (l) The preferred CARS audio allocation shall be as follows:
 - (1) voice communication; and
 - (2) aural environment on the flight deck.

(m) Recording Technology

CVRs and CARS shall not use magnetic tape or wire.

(n) Duration

(1) All CVRs installed on aeroplanes or helicopters shall retain the information recorded during at least the last 2 hours of their operation.

(2) All CVRs installed on aeroplanes of a maximum certificated take-off mass of over 27 000 kg for which the individual certificate of airworthiness is first issued on or after 1 January 2021 shall retain the information recorded during at least the last 25 hours of its operation.

(o) Cockpit Voice Recorder Alternate Power Source

(1) [AOC] No person may operate an aeroplane required to be equipped with a CVR unless it is equipped with CVR alternate power that

- (i) automatically engages and provides ten minutes, plus or minus one minute, of operation whenever aeroplane power to the recorder ceases, either by normal shutdown or by any other loss of power;
- (ii) powers the CVR and its associated cockpit area microphone components, and
- (iii) is located as close as practicable to the alternate power source

(2) [AOC] No person may operate an aeroplane of a maximum certificated take-off mass of over 27 000 kg for which the individual certificate of airworthiness is first issued on or after 1 January 2018 unless it is equipped with an alternate power source, as described in (1) above, that powers—

- (i) the forward CVR in the case of combination recorders, or
- (ii) at least one CVR.

Note 1. "Alternate" means separate from the power source that normally provides power to the CVR. The use of aeroplane batteries or other power sources is acceptable provided that the requirements above are met and electrical power to essential and critical loads is not compromised.

Note 2. When the CVR function is combined with other recording functions within the same unit, powering the other functions is allowed.

7.8.1.3 DATA LINK RECORDERS (DLR) AND DATA LINK RECORDING SYSTEMS (DLRS)

(a) [AAC] All aeroplanes or helicopters for which the individual certificate of airworthiness is first issued on or after 1 January 2016, which utilize any of the data link communications applications listed in Table A-2 of Appendix APP: 7.8.1.1 and are required to carry a CVR, shall record on a crash-protected flight recorder the data link communications messages.

(b) [AAC] All aeroplanes or helicopters which are modified on or after 1 January 2016 to install and utilize any of the data link communications applications listed in Table A-2 of Appendix APP: 7.8.1.1 and are required to carry a CVR, shall record on a crash-protected flight recorder the data link communications messages.

Note: A Class B AIR could be a means for recording data link communications applications messages to and from the aircraft where it is not practical or is prohibitively expensive to record those data link communications applications messages on FDR or CVR.

(c) Duration

The minimum recording duration shall be equal to the duration of the CVR.

(d) **Correlation**

Data link recording shall be able to be correlated to the recorded cockpit audio.

7.8.1.4 FLIGHT CREW-MACHINE INTERFACE RECORDINGS/ AN AIRBORNE IMAGE RECORDER (AIR)

(a) All aeroplanes of a maximum take-off mass of over 5 700 kg for which the application for type certification is submitted to a Contracting State on or after 1 January 2023 shall be equipped with a crash-protected flight recorder which shall record the information displayed to the flight crew from electronic displays, as well as the operation of switches and selectors by the flight crew as defined in Appendix APP: 7.8.1.4.

(b) **Duration**

The minimum flight crew-machine interface recording duration shall be at least for the last two hours.

(c) **Correlation**

Flight crew-machine interface recordings shall be able to be correlated to the recorded cockpit audio.

7.8.2 CONSTRUCTION AND INSTALLATION

(a) Flight recorders systems shall be constructed, located and installed so as to provide maximum practical protection for the recordings in order that the recorded information may be preserved, recovered and transcribed. Flight recorders shall meet the prescribed crashworthiness and fire protection specifications. The flight recorder systems containers shall:

- (1) Be painted a distinctive orange or yellow colour;
- (2) Carry reflective material to facilitate their location; and
- (3) Have securely attached an automatically activated underwater locating device operating at a frequency of 37.5 kHz. At the earliest practicable date, but not later than 1 January 2018, this device shall operate for a minimum of 90 days.

(b) Flight recorder systems shall be installed so that:

- (1) The probability of damage to the recordings is minimised;
- (2) They receive electrical power from a bus that provides the maximum reliability for operation of the flight recorder systems without jeopardising service to essential or emergency loads;
- (3) There is an aural or visual means for pre-flight checking that the flight recorder systems are operating properly; and
- (4) If the flight recorder systems have an erasure device, the installation shall be designed to prevent operation of the device during flight time or crash impact.
- (5) They meet the prescribed crashworthiness and fire protection specifications.

(c) For aeroplanes for which the individual certificate of airworthiness is first issued on or after 1 January 2023, a flight crew-operated erase function shall be provided on the flight deck which, when activated, modifies the recording of a CVR and AIR so that it cannot be retrieved using normal replay or copying techniques. The installation shall be designed to prevent activation during flight. In addition, the probability of an inadvertent activation of an erase function during an accident shall also be minimized.

(d) The flight recorder systems, when tested by methods approved by the [appropriate certificating authority], shall be demonstrated to be suitable for the environmental extremes over which they are designed to operate.

(e) Means shall be provided for an accurate time correlation between the flight recorder systems recordings.

- (f) The manufacturer shall provide the [appropriate certificating authority] with the following information in respect of the flight recording systems:
- (1) manufacturer's operating instructions, equipment limitations and installation procedures;
 - (2) manufacturer's test reports; and
 - (3) for aeroplane flight recording systems, parameter origin or source and equations which relate counts to units of measurement;

Note 1: The term "appropriate certificating authority" refers to the State of Design.

Note 2: Industry crashworthiness and fire protection specifications for FDR, CVR, AIR and DLR are as contained in the EUROCAE ED-112, Minimum Operational Performance Specifications (MOPS) for Crash Protected Airborne Recorder Systems, or equivalent documents.

Note 3: Industry crashworthiness and fire protection specifications for ADRS and CARS are as contained in the EUROCAE ED-155, Minimum Operational Performance Specifications (MOPS) for Lightweight Flight Recording Systems, or equivalent documents.

7.8.3 OPERATION

- (a) Flight recorder systems shall not be switched off during flight time.
- (b) To preserve flight recorder records, flight recorders shall be deactivated upon completion of flight time following an accident or incident. The flight recorders shall not be reactivated before their disposition as determined in accordance with the accident/incident regulations of Myanmar.

Note 1: The need for removal of the flight recorder records from the aircraft will be determined by the investigation authority in Myanmar conducting the investigation with due regard to the seriousness of an occurrence and the circumstances, including the impact on the operation.

Note 2: The operator's responsibilities regarding the retention of flight recorder records are contained in the accident/incident regulations of Myanmar.

7.8.4 CONTINUED SERVICEABILITY AND INSPECTION OF FLIGHT RECORDER SYSTEMS

- (a) The operator shall conduct operational checks and evaluations of recordings from the flight recorder systems to ensure the continued serviceability of the recorders.
- (b) The procedures for the inspections of the flight recorder systems are given in Airworthiness Notices T/22.

7.8.5 FLIGHT RECORDER DOCUMENTATION

- (a) The air operators shall maintain up-to-date and sufficient documentation concerning FDR parameter allocation, conversion equations, periodic calibration and other serviceability/ maintenance information and ensure their availability to accident investigation authorities.
- (b) The documentation needs to be sufficient to ensure that accident investigation authorities have the necessary information to read out the data in engineering units.
- (c) Operators shall provide to accident investigation authorities the documentation of flight recording systems parameters in electronic format and in accordance with industry specifications.

Note: Industry specification for documentation concerning flight recorder parameters may be found in the ARINC 647A, Flight Recorder Electronic Documentation, or equivalent document.

7.8.6 COMBINATION RECORDERS

- (a) [AAC] No person may operate an aeroplane of a maximum certificated take-off mass over 5 700 kg, required to be equipped with a CVR and an FDR, unless it is equipped with a CVR and an FDR or alternatively equipped with two combination recorders (FDR/CVR).

Note: The requirement may be satisfied by equipping the aeroplanes with two combination recorders (one forward and one aft) or separate devices.

- (b) [AOC] No person may operate an aeroplane of a maximum certificated take-off mass of over 5 700 kg for which the application for type certification is submitted to a Contracting State on or after 1 January 2016, and which is required to be equipped with both a CVR and an FDR, unless it is equipped with two combination recorders (FDR/CVR).
- (c) [AOC] No person may operate an aeroplane of a maximum certificated take-off mass of over 15 000 kg for which the application for type certification is submitted to a Contracting State on or after 1 January 2016, and which is required to be equipped with both a CVR and an FDR, unless it is equipped with two combination recorders (FDR/CVR). One recorder shall be located as close to the cockpit as practicable and the other recorder located as far aft as practicable.
- (d) [AOC] No person may operate a multi-engined turbine-powered aeroplane of a maximum certificated take-off mass of 5 700 kg or less, required to be equipped with a CVR and an FDR, unless it is equipped with a CVR and an FDR or alternatively be equipped with one combination recorder (FDR/CVR).

7.8.7 FLIGHT RECORDER DATA RECOVERY

- (a) [AOC] All aeroplanes of a maximum certificated take-off mass of over 27 000 kg and authorized to carry more than nineteen passengers for which the application for type certification is submitted to a Contracting State on or after 1 January 2021, shall be equipped with a means approved by the State of the Operator, to recover flight recorder data and make it available in a timely manner.
- (b) In approving the means to make flight recorder data available in a timely manner, the State of the Operator shall take into account the following
 - (1) the capabilities of the operator;
 - (2) overall capability of the aeroplane and its systems as certified by the State of Design;
 - (3) the reliability of the means to recover the appropriate CVR channels and appropriate FDR data; and
 - (4) specific mitigation measures

7.9 EMERGENCY, RESCUE, AND SURVIVAL EQUIPMENT

7.9.1.1 EMERGENCY EQUIPMENT: ALL AIRCRAFT

[AAC] Each item of emergency and flotation equipment shall be—

- (1) Readily accessible to the crew and, with regard to equipment located in the passenger compartment, to passengers without appreciable time for preparatory procedures;
- (2) Clearly identified and clearly marked to indicate its method of operation;
- (3) Marked as to date of last inspection; and
- (4) Marked as to contents when carried in a compartment or container.

7.9.1.2 EMERGENCY EXIT EQUIPMENT - PASSENGERS

- (a) No person shall operate an aeroplane without the following emergency exit equipment:
 - (1) [AAC] Each passenger-carrying land plane emergency exit (other than over-the-wing) that is more than 6 feet from the ground with the aeroplane on the ground and the landing gear extended, shall have an approved means to assist the occupants in descending to the ground.

- (2) [AAC] Each passenger emergency exit, its means of access, and its means of opening shall be conspicuously marked by a sign visible to occupants approaching along the main passenger aisle.
 - (3) [AAC] Each passenger-carrying aeroplane shall have an emergency lighting system, independent of the main lighting system that—
 - (i) Illuminates each passenger exit marking and locating sign;
 - (ii) Provides enough general lighting in the passenger cabin; and
 - (iii) [AOC] Includes floor proximity emergency escape path marking.
 - (4) [AAC] Each passenger emergency exit and the means of opening that exit from the outside shall be marked on the outside of the aeroplane.
 - (5) [AAC] Each passenger-carrying aeroplane shall be equipped with a slip-resistant escape route that meets the requirements under which that aeroplane was type certified.
 - (6) Each passenger carrying aeroplane shall meet the detailed requirements contained in Appendix APP: 7.9.1.2 of this part.
- (b) No person shall operate a helicopter certificated with a maximum take-off mass of 7000 pounds or less and 9 or less passenger seats without the following emergency exit equipment:
- (1) *Number and location.*
 - (i) There must be at least one emergency exit on each side of the cabin readily accessible to each passenger. One of these exits must be usable in any probable attitude that may result from a crash.
 - (ii) Doors intended for normal use may also serve as emergency exits, provided that they meet the requirements of this section.
 - (iii) If emergency flotation devices are installed, there must be an emergency exit accessible to each passenger on each side of the cabin that is shown by test, demonstration, or analysis to—
 - (A) Be above the waterline; and
 - (B) Be open without interference from flotation devices, whether stowed or deployed.
 - (2) *Type and operation.* Each emergency exit prescribed by paragraph (a) of this section must—
 - (i) Consist of a movable window or panel, or additional external door, providing an unobstructed opening that will admit a 19-by 26-inch ellipse;
 - (ii) Have simple and obvious methods of opening, from the inside and from the outside, which do not require exceptional effort;
 - (iii) Be arranged and marked so as to be readily located and opened even in darkness; and
 - (iv) Be reasonably protected from jamming by fuselage deformation.
 - (3) *Ditching emergency exits for passengers.* If certification with ditching provisions is requested, the markings required by (1)(iii) of this paragraph must be designed to remain visible if the rotorcraft is capsized and the cabin is submerged.
- (c) No person shall operate a helicopter certificated with a maximum take-off mass of more than 20000 pounds and ten or more passenger seats without the following emergency exit equipment:
- (1) *Passenger emergency exits and openings.* Openings with dimensions larger than those specified below may be used, regardless of shape, if the base of the opening has a flat surface of not less than the specified width. For the purpose of this part, the types of passenger emergency exit shall be as follows:
 - (i) Type I. This type shall have a rectangular opening of not less than 24 inches wide by 48 inches high, with corner radii not greater than one-third the width of the exit, in the passenger area in the side of the fuselage at floor level and as far away as practicable from areas that might become potential fire hazards in a crash.

- (ii) Type II. This type is the same as Type I, except that the opening shall be at least 20 inches wide by 44 inches high.
 - (iii) Type III. This type is the same as Type I, except that—
 - (A) The opening shall be at least 20 inches wide by 36 inches high; and
 - (B) The exits need not be at floor level.
 - (iv) Type IV. This type shall have a rectangular opening of not less than 19 inches wide by 26 inches high, with corner radii not greater than one-third the width of the exit, in the side of the fuselage with a step-up inside the rotorcraft of not more than 29 inches.
- (2) *Passenger emergency exits; side-of-fuselage.* Emergency exits shall be accessible to the passengers and, except as provided in (c)(4) of this paragraph, must be provided in accordance with the following table: Emergency exits for each side of the fuselage

Passenger seating capacity	Emergency exits for each side of the fuselage			
	Type I	Type II	Type III	Type IV
1 through 10				1
11 through 19			1 or	2
20 through 39		1		1
40 through 59	1			1
60 through 79	1		1 or	2

- (3) *Passenger emergency exits; other than side-of-fuselage.* In addition to the requirements of item (2) of this paragraph—
- (i) There shall be enough openings in the top, bottom, or ends of the fuselage to allow evacuation with the rotorcraft on its side; or
 - (ii) The probability of the rotorcraft coming to rest on its side in a crash landing must be extremely remote.
- (4) *Ditching emergency exits for passengers.* If the helicopter was certificated with ditching provisions, ditching emergency exits shall be provided in accordance with the following:
- (i) For rotorcraft that have a passenger seating configuration, excluding pilots seats, of 9 seats or less, one exit above the waterline in each side of the rotorcraft, meeting at least the dimensions of a Type IV exit.
 - (ii) For rotorcraft that have a passenger seating configuration, excluding pilots seats, of 10 seats or more, one exit above the waterline in a side of the rotorcraft meeting at least the dimensions of a Type III exit, for each unit (or part of a unit) of 35 passenger seats, but no less than two such exits in the passenger cabin, with one on each side of the rotorcraft. However, where it has been shown through analysis, ditching demonstrations, or any other tests found necessary, that the evacuation capability of the rotorcraft during ditching is improved by the use of larger exits, or by other means, the passenger seat to exit ratio may be increased.
 - (iii) Flotation devices, whether stowed or deployed, may not interfere with or obstruct the exits.
- (5) *Ramp exits.* One Type I exit only, or one Type II exit only, that is required in the side of the fuselage under paragraph (b) of this section, may be installed instead in the ramp of floor ramp rotorcraft if—

- (i) Its installation in the side of the fuselage is impractical; and
 - (ii) Its installation in the ramp meets emergency exit access requirements in paragraph (g) below.
- (d) *Emergency exit arrangement.*
- (1) Each emergency exit shall consist of a movable door or hatch in the external walls of the fuselage and must provide an unobstructed opening to the outside.
 - (2) Each emergency exit shall be openable from the inside and from the outside.
 - (3) The means of opening each emergency exit shall be simple and obvious and may not require exceptional effort.
 - (4) There shall be means for locking each emergency exit and for preventing opening in flight inadvertently or as a result of mechanical failure.
 - (5) There shall be means to minimize the probability of the jamming of any emergency exit in a minor crash landing as a result of fuselage deformation under the ultimate inertial forces –
 - (i) Upward – 1.5g;
 - (ii) Forward – 4.0g;
 - (iii) Sideward – 2.0g;
 - (iv) Downward – 4.0g.
 - (6) Except as provided in item (8) of this paragraph, each land-based rotorcraft emergency exit must have an approved slide as stated in paragraph (g) of this subsection, or its equivalent, to assist occupants in descending to the ground from each floor level exit and an approved rope, or its equivalent, for all other exits, if the exit threshold is more than 6 feet above the ground—
 - (i) With the rotorcraft on the ground and with the landing gear extended;
 - (ii) With one or more legs or part of the landing gear collapsed, broken, or not extended; and
 - (iii) With the rotorcraft resting on its side, provided this was accomplished during the emergency evacuation test during type certification of the helicopter.
 - (7) The slide for each passenger emergency exit shall be a self-supporting slide or equivalent, and shall be designed to meet the following requirements:
 - (i) It shall be automatically deployed, and deployment shall begin during the interval between the time the exit opening means is actuated from inside the rotorcraft and the time the exit is fully opened. However, each passenger emergency exit which is also a passenger entrance door or a service door shall be provided with means to prevent deployment of the slide when the exit is opened from either the inside or the outside under non-emergency conditions for normal use.
 - (ii) It shall be automatically erected within 10 seconds after deployment is begun.
 - (iii) It shall be of such length after full deployment that the lower end is self-supporting on the ground and provides safe evacuation of occupants to the ground after collapse of one or more legs or part of the landing gear.
 - (iv) It shall have the capability, in 25-knot winds directed from the most critical angle, to deploy and, with the assistance of only one person, to remain usable after full deployment to evacuate occupants safely to the ground.
 - (v) For helicopters having 30 or fewer passenger seats and having an exit threshold more than 6 feet above the ground, a rope or other assist means may be used in place of the slide specified in item (6) of this paragraph, provided this was accomplished during the emergency evacuation test during type certification of the helicopter.

- (8) If a rope, with its attachment, is used for compliance with items (6), (7), or (8) of this paragraph, it shall—
- (i) Withstand a 400-pound static load; and
 - (ii) Attach to the fuselage structure at or above the top of the emergency exit opening, or at another approved location if the stowed rope would reduce the pilot's view in flight.
- (e) *Emergency exit marking.*
- (1) Each passenger emergency exit, its means of access, and its means of opening shall be conspicuously marked for the guidance of occupants using the exits in daylight or in the dark. Such markings shall be designed to remain visible for rotorcraft equipped for over water flights if the rotorcraft is capsized and the cabin is submerged.
 - (2) The identity and location of each passenger emergency exit shall be recognizable from a distance equal to the width of the cabin.
 - (3) The location of each passenger emergency exit shall be indicated by a sign visible to occupants approaching along the main passenger aisle. There shall be a locating sign—
 - (i) Next to or above the aisle near each floor emergency exit, except that one sign may serve two exits if both exits can be seen readily from that sign; and
 - (ii) On each bulkhead or divider that prevents fore and aft vision along the passenger cabin, to indicate emergency exits beyond and obscured by it, except that if this is not possible the sign may be placed at another appropriate location.
 - (4) Each passenger emergency exit marking and each locating sign shall have white letters 1 inch high on a red background 2 inches high, be self or electrically illuminated, and have a minimum luminescence (brightness) of at least 160 micro lamberts. The colors may be reversed if this will increase the emergency illumination of the passenger compartment.
 - (5) The location of each passenger emergency exit operating handle and instructions for opening shall be shown—
 - (i) For each emergency exit, by a marking on or near the exit that is readable from a distance of 30 inches; and
 - (ii) For each Type I or Type II emergency exit with a locking mechanism released by rotary motion of the handle, by—
 - (A) A red arrow, with a shaft at least three-fourths inch wide and a head twice the width of the shaft, extending along at least 70 degrees of arc at a radius approximately equal to three-fourths of the handle length; and
 - (B) The word "open" in red letters 1 inch high, placed horizontally near the head of the arrow.
 - (6) Each emergency exit, and its means of opening, shall be marked on the outside of the rotorcraft. In addition, the following apply—
 - (i) There shall be a 2-inch colored band outlining each passenger emergency exit, except small rotorcraft with a maximum weight of 12,500 pounds or less may have a 2-inch colored band outlining each exit release lever or device of passenger emergency exits which are normally used doors.
 - (ii) Each outside marking, including the band, shall have color contrast to be readily distinguishable from the surrounding fuselage surface. The contrast shall be such that, if the reflectance of the darker color is 15 percent or less, the reflectance of the lighter color must be at least 45 percent. "Reflectance" is the ratio of the luminous flux reflected by a body to the luminous flux it receives. When the reflectance of the darker color is greater than 15 percent, at least a 30 percent difference between its reflectance and the reflectance of the lighter color must be provided.

- (f) *Emergency lighting.* The following apply:
- (1) A source of light with its power supply independent of the main lighting system shall be installed to—
 - (i) Illuminate each passenger emergency exit marking and locating sign; and
 - (ii) Provide enough general lighting in the passenger cabin so that the average illumination, when measured at 40-inch intervals at seat armrest height on the center line of the main passenger aisle, is at least 0.05 foot-candle.
 - (2) Exterior emergency lighting shall be provided at each emergency exit. The illumination may not be less than 0.05 foot-candle (measured normal to the direction of incident light) for minimum width on the ground surface, with landing gear extended, equal to the width of the emergency exit where an evacuee is likely to make first contact with the ground outside the cabin. The exterior emergency lighting may be provided by either interior or exterior sources with light intensity measurements made with the emergency exits open.
 - (3) Each light required by item (1) or (2) of this paragraph shall be operable manually from the cockpit station and from a point in the passenger compartment that is readily accessible. The cockpit control device must have an "on," "off," and "armed" position so that when turned on at the cockpit or passenger compartment station or when armed at the cockpit station, the emergency lights will either illuminate or remain illuminated upon interruption of the rotorcraft's normal electric power.
 - (4) Any means required to assist the occupants in descending to the ground shall be illuminated so that the erected assist means is visible from the rotorcraft.
 - (i) The assist means must be provided with an illumination of not less than 0.03 foot-candle (measured normal to the direction of the incident light) at the ground end of the erected assist means where an evacuee using the established escape route would normally make first contact with the ground, with the rotorcraft in each of the attitudes corresponding to the collapse of one or more legs of the landing gear.
 - (ii) If the emergency lighting subsystem illuminating the assist means is independent of the rotorcraft's main emergency lighting system, it—
 - (A) Will automatically be activated when the assist means is erected;
 - (B) Will provide the illumination required by (4)(i) above; and
 - (C) Will not be adversely affected by stowage.
 - (5) The energy supply to each emergency lighting unit shall provide the required level of illumination for at least 10 minutes at the critical ambient conditions after an emergency landing.
 - (6) If storage batteries are used as the energy supply for the emergency lighting system, they may be recharged from the rotorcraft's main electrical power system provided the charging circuit is designed to preclude inadvertent battery discharge into charging circuit faults.
- (g) *Emergency exit access.*
- (1) Each passageway between passenger compartments, and each passageway leading to Type I and Type II emergency exits, shall be—
 - (i) Unobstructed; and
 - (ii) At least 20 inches wide.
 - (2) For each emergency exit covered by (d)(6) in this paragraph, there shall be enough space adjacent to that exit to allow a crewmember to assist in the evacuation of passengers without reducing the unobstructed width of the passageway below that required for that exit.
 - (3) There shall be access from each aisle to each Type III and Type IV exit, and

- (i) For rotorcraft that have a passenger seating configuration, excluding pilot seats, of 20 or more, the projected opening of the exit provided shall not be obstructed by seats, berths, or other protrusions (including seatbacks in any position) for a distance from that exit of not less than the width of the narrowest passenger seat installed on the rotorcraft;
 - (ii) For rotorcraft that have a passenger seating configuration, excluding pilot seats, of 19 or less, there may be minor obstructions in the region described in (g)(3) (i) of this paragraph, if there are compensating factors to maintain the effectiveness of the exit.
- (h) *Main aisle width.* The main passenger aisle width between seats must equal or exceed the values in the following table:

Passenger seating capacity	Minimum main passenger aisle width	
	Less than 25 inches from floor (inches)	25 Inches and more from floor (inches)
10 or less	12	15
11 through 19	12	20
20 or more	15	20

Note: A narrower width not less than 9 inches may be approved when substantiated by tests found necessary by the State of Manufacturer.

7.9.1.3 VISUAL SIGNALLING DEVICES

[AAC] No person may operate an aircraft over water or across land areas which have been designated by Republic of the Union of Myanmar as areas in which search and rescue would be especially difficult, unless equipped with such signalling devices as may be appropriate to the area overflown, to include—

- (1) At least one pyrotechnic signalling device for each life raft required for overwater operations; and
- (2) Any other requirements specified by Republic of the Union of Myanmar.

7.9.1.4 SURVIVAL KITS

[AAC] No person may operate an aircraft across land areas which have been designated by Republic of the Union of Myanmar as areas in which search and rescue would be especially difficult, unless equipped with enough survival kits for the number of occupants of the aeroplane appropriate for the route to be flown.

7.9.1.5 EMERGENCY LOCATOR TRANSMITTER

- (a) No person shall operate an aeroplane without the following emergency locator equipment:
 - (1) [AAC] Except as provided for in paragraph (2), all aeroplanes authorized to carry more than 19 passengers shall be equipped with at least one automatic ELT that transmits on 121.5 MHz and 406 MHz simultaneously for international operations and transmits either on both 121.5 MHz and 406 MHz or on 121.5 MHz for domestic operations.
 - (2) [AAC] All aeroplanes authorized to carry more than 19 passengers for which the individual certificate of airworthiness is first issued after 1 July 2008 shall be equipped with at least two ELTs that transmit on 121.5 MHz and 406 MHz simultaneously for international operations and transmit either on both 121.5 MHz and 406 MHz or on 121.5 MHz for domestic operations, one of which shall be automatic.

- (3) [AAC] Except as provided for in paragraph (4), all aeroplanes authorized to carry 19 passengers or less shall be equipped with at least one ELT of any type that transmits on 121.5 MHz and 406 MHz simultaneously for international operations and transmits either on both 121.5 MHz and 406 MHz or on 121.5 MHz for domestic operations.
 - (4) [AAC] All aeroplanes authorized to carry 19 passengers or less for which the individual certificate of airworthiness is first issued after 1 July 2008 shall be equipped with at least one automatic ELT that transmits on 121.5 MHz and 406 MHz simultaneously for international operations and transmits either on both 121.5 MHz and 406 MHz or on 121.5 MHz for domestic operations.
 - (5) [AOC] No person may operate an aeroplane in long-range over water operations or over designated land areas where search and rescue would be especially difficult, without having on the aeroplane at least two ELTs, one of which shall be automatic.
 - (6) [AAC] Batteries used in ELTs shall be replaced (or recharged if the battery is rechargeable) when—
 - (i) The transmitter has been in use for more than one cumulative hour; or
 - (ii) 50 percent of their useful life (or for rechargeable batteries, 50 percent of their useful life of charge) has expired.
 - (7) [AAC] The date for a replacement of the battery in the ELT shall be legibly marked on the outside of the transmitter.
 - (8) [AOC] At least one survival type ELT shall be located with each life-raft carried (Note: See 7.9.1.17).
- (b) No person shall operate helicopter without the following emergency locator equipment:
- (1) [AAC] All helicopters shall be equipped with an automatically activated ELT that transmits on 121.5 MHz and 406 MHz simultaneously for international operations and transmits either on both 121.5 MHz and 406 MHz or on 121.5 MHz for domestic operations.
 - (2) [AAC] All helicopters operating on flights over water or a hostile environment, designated as a land area where search and rescue would be especially difficult shall be equipped with at least one automatic ELT and one ELT(s) in each life-raft carried on board. (Note: See 7.9.1.17).
- Note 1: When operating in a hostile environment, a safe ditching requires a helicopter to be designed for landing on water or certificated in accordance with ditching provisions.*
- Note 2: The judicious choice of number of ELTs, their type and placement on aircraft and associated floatable life support systems will ensure the greatest chance of ELT activation in the event of an accident for aircraft operating over water or land including areas especially difficult for search and rescue. Placement of transmitter units is a vital factor in ensuring optimal crash and fire protection. The placement of the control and switching devices (activation monitors of automatic fixed ELTs and their associated operational procedures will also take into consideration the need for rapid detection of inadvertent activation and convenient manual switching by crew members.*
- (3) [AAC] Batteries used in ELTs shall be replaced (or recharged if the battery is rechargeable) when—
 - (i) The transmitter has been in use for more than one cumulative hour; or
 - (ii) 50 percent of their useful life (or for rechargeable batteries, 50 percent of their useful life of charge) has expired.
 - (4) [AAC] The date for a replacement of the battery in the ELT shall be legibly marked on the outside of the transmitter.

- (5) [AAC] At least one survival type ELT shall be located with each life-raft carried (See 7.9.1.17).
- (c) ELT equipment carried to satisfy the requirements of (a) and (b) shall operate in accordance with the relevant provisions of ICAO Annex 10, Volume III.

Note: The battery useful life (or useful life of charge) requirements do not apply to batteries (such as water-activated batteries) that are essentially unaffected during probable storage intervals.

7.9.1.6 PORTABLE FIRE EXTINGUISHERS

- (a) [AAC] No person may operate an aircraft unless it is equipped with portable fire extinguishers of a type which, when discharged, will not cause dangerous contamination of the air within the aircraft. At least one shall be located in —
- (1) The pilot's compartment; and
 - (2) Each passenger compartment that is separate from the pilot's compartment and not readily accessible to the flight crew.

Note: Any portable fire extinguisher so fitted in accordance with the certificate of airworthiness of the aeroplane may count as one prescribed.

- (b) [AOC] No person may operate an aircraft unless it is equipped with portable fire extinguishers accessible for use in crew, passenger, and cargo compartments as follows:
- (1) The type and quantity of extinguishing agent shall be suitable for the kinds of fires likely to occur in the compartment where the extinguisher is intended to be used.
 - (2) At least one portable fire extinguisher shall be provided and conveniently located for use in each Class E cargo compartment which is accessible to crew members during flight, and at least one shall be located in each upper and lower lobe galley.
 - (3) At least one portable fire extinguisher shall be conveniently located on the flight deck for use by the flight crew.
 - (4) At least one portable fire extinguisher shall be conveniently located in the passenger compartment if the passenger compartment is separate from the flight deck and not readily accessible to the flight crew.
 - (5) For each aeroplane having a passenger seating capacity of more than 30, there shall be at least the following number of portable fire extinguishers conveniently located and uniformly distributed throughout the compartment.

Minimum Number of Hand Fire Extinguishers Passenger Seating Capacity	
7 through 29	1
30 through 60	2
61 through 200	3
201 through 300	4
301 through 400	5
401 through 500	6
501 through 600	7
601 or more	8

- (c) [AAC] Any extinguishing agent used in a portable fire extinguisher in an aircraft for which the individual certificate of airworthiness is first issued on or after 31 December 2018, shall:

- (1) Meet the applicable minimum performance requirements of the State of Registry; and
- (2) Not contain Halon 1211, Halon 1301, or Halon 2402

Note 1: The substances listed in (c)(2) above of Halon 1211, Halon 1301, and Halon 2402 are listed Annex A, Group II of the Montreal Protocol on Substances that Deplete the Ozone Layer, 8th Edition, 2009.

Note 2: Information concerning extinguishing agents is contained in the UNEP Halons Technical Options Committee Technical Note Number 1 – New Technology Halon Alternatives and FAA Report Number DOT/FAA/AR-99-63, Options to the Use of Halons for Aircraft Fire Suppression Systems.

7.9.1.7 LAVATORY FIRE EXTINGUISHER

- (a) [AAC] No person may operate an aircraft for the purpose of international flight unless each lavatory in the aircraft is equipped with a built-in fire extinguisher for each disposal receptacle for towels, paper, or waste located within the lavatory.
- (b) [AAC] Built-in lavatory fire extinguishers shall be designed to discharge automatically into each disposal receptacle upon occurrence of a fire in the receptacle.
- (c) [AAC] Any agent used in a built-in fire extinguisher for each lavatory disposal receptacle for towels, paper or waste in an aircraft for the purpose of international flight and for which the individual certificate of airworthiness is first issued on or after 31 December 2011, shall:
 - (1) Meet the applicable minimum performance requirements of the State of Registry; and
 - (2) Not contain Halon 1211, Halon 1301, or Halon 2402

Note 1: The substances listed in (c)(2) above of Halon 1211, Halon 1301, and Halon 2402 are listed Annex A, Group II of the Montreal Protocol on Substances that Deplete the Ozone Layer, 8th Edition, 2009.

Note 2: Information concerning extinguishing agents is contained in the UNEP Halons Technical Options Committee Technical Note Number 1 – New Technology Halon Alternatives and FAA Report Number DOT/FAA/AR-99-63, Options to the Use of Halons for Aircraft Fire Suppression Systems.

7.9.1.8 LAVATORY SMOKE DETECTOR

[AOC] No person may operate a passenger-carrying transport category aeroplane unless each lavatory in the aeroplane is equipped with a smoke detector system or equivalent that provides—


- (1) A warning light in the cockpit; or
- (2) A warning light or audio warning in the passenger cabin which would be readily detected by a cabin crew member, taking into consideration the positioning of cabin crew members throughout the passenger compartment during various phases of flight.

7.9.1.9 CRASH AXE

[AAC] No person shall operate an aeroplane certificated with a take-off mass of 5 700 kg or more unless it is equipped with a crash axe appropriate for effective use in that type of aeroplane, stored in a place not visible to passengers on the aeroplane.

7.9.1.10 MARKING OF BREAK-IN POINTS

- (a) [AAC] If areas of the fuselage suitable for break-in by rescue crews in an emergency are marked on an aeroplane, such areas shall be marked as shown below, and the colour of the markings shall be red or yellow and, if necessary, they shall be outlined in white to contrast with the background.

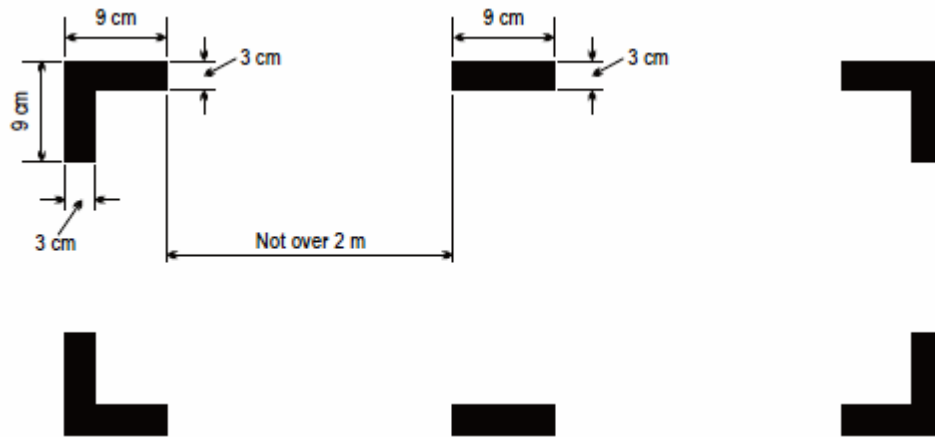

- (b) If the corner markings are more than 2 m apart, intermediate lines 9 cm x 3 cm shall be inserted so that there is no more than 2 m between adjacent markings.

7.9.1.11 MEDICAL SUPPLIES

- (a) No person may operate an aeroplane unless it is equipped with accessible and adequate medical supplies that include the following:-
- (1) [AAC] one or more first-aid kits; and
 - (2) [AOC] for aeroplanes operating for the purpose of international commercial air transport operations and required to carry cabin crew as part of the operating crew, one universal precaution kit (two for aeroplanes authorized to carry more than 250 passengers) for the use of cabin crew members in managing incidents of ill health associated with a case of suspected communicable disease, or in the case of illness involving contact with body fluids; and
 - (3) [AOC] for aeroplanes operating for the purpose of international commercial air transport operations and authorized to carry more than 100 passengers, on a sector length of more than two hours, a medical kit, for the use of medical doctors or other qualified persons in treating in-flight medical emergencies.
- (b) No person may operate a helicopter unless it is equipped with accessible and adequate medical supplies that include the following:-
- (1) [AAC] one first-aid kits; and
 - (2) [AOC] for helicopters operating for the purpose of international commercial air transport operations and required to carry cabin crew as part of the operating crew, one universal precaution kit, for the use of cabin crew in managing incidents of ill health associated with a case of suspected communicable disease, or in the case of illness involving contact with body fluids.
- (c) The types, number, location and contents of the medical supplies to be carried shall comply with Appendix: APP: 7.9.1.11 of this part.

7.9.1.12 OXYGEN STORAGE AND DISPENSING APPARATUS

- (a) [AAC] All aircraft intended to be operated at altitudes requiring the use of supplemental oxygen shall be equipped with adequate oxygen storage and dispensing apparatus.
- (b) [AAC] The oxygen apparatus, the minimum rate of oxygen flow, and the supply of oxygen shall meet applicable airworthiness standards for type certification in the transport category as specified by the Authority.
- (c) [AAC] An aircraft intended to be operated at flight altitudes at which the atmospheric pressure is less than 700 hectopascal (hPa) in personnel compartments shall be equipped with oxygen storage and dispensing apparatus capable of storing and dispensing the oxygen supplies required for
 - (1) all crew members and 10 % of the passengers for any period in excess of 30 minutes that the pressure in compartments occupied by them will be between 700 hPa and 620 hPa; and
 - (2) the crew and passengers for any period that the atmospheric pressure in compartments occupied by them will be less than 620 hPa.
- (d) [AAC] An aircraft intended to be operated at flight altitudes at which the atmospheric pressure is less than 700 hPa but which is provided with means of maintaining pressures greater than 700 hPa in personnel compartments shall be provided with oxygen storage and dispensing apparatus capable of storing and dispensing the oxygen supplies required for all the crew members and passengers, as is appropriate to the circumstances of the flight being undertaken, in the event of loss of pressurization, for any period that the atmospheric pressure in any compartment occupied by them would be less than 700 hPa.
- (e) [AAC] An aircraft intended to be operated at flight altitudes at which the atmospheric pressure is less than 376 hPa, or which, if operated at flight altitudes at which the atmospheric pressure is more than 376 hPa, cannot descend safely within four minutes to a flight altitude at which the atmospheric pressure is equal to 620 hPa shall be provided with automatically deployable oxygen equipment to supply for the occupants of the passenger compartment not less than for 10 minutes. The total number of oxygen dispensing units shall exceed the number of passenger and cabin crew seats by at least 10 %. The extra units are to be evenly distributed through out the cabin.
- (f) [AAC] Pressurized aircraft intended to be operated at flight altitudes at which the atmospheric pressure is less than 376 hPa shall be equipped with a device to provide positive warning to the pilot of any dangerous loss of pressurization.
- (g) [AAC] The amount of supplemental oxygen for sustenance required for a particular operation shall be determined on the basis of flight altitudes and flight duration, consistent with the operating procedures established for each operation in the Operations Manual and with the routes to be flown, and with the emergency procedures specified in the Operations Manual. See Appendix APP: 7.9.1.12 to determine the amount of supplemental oxygen needed for non-pressurized and pressurized aircraft.

7.9.1.13 PROTECTIVE BREATHING EQUIPMENT

- (a) [AOC] No AOC holder may operate an aeroplane with a maximum certified takeoff mass exceeding 5700 kg or having a maximum approved seating configuration of more than 19 seats unless—
 - (1) It has PBE to protect the eyes, nose and mouth of each flight crew member while on flight deck duty and to provide oxygen for a period of not less than 15 minutes; and
 - (2) It has sufficient portable PBE to protect the eyes, nose and mouth of all required cabin crew members and to provide breathing gas for a period of not less than 15 minutes.
- (b) [AOC] The oxygen supply for PBE may be provided by the required supplemental oxygen system.
- (c) [AOC] The PBE intended for flight crew use shall be conveniently located on the flight deck and be easily accessible for immediate use by each required flight crew member at their assigned duty station.

- (d) [AOC] The PBE intended for cabin crew use shall be installed adjacent to each required cabin crew member duty station.
- (e) [AOC] Easily accessible portable PBE shall be provided and located at or adjacent to the required hand fire extinguishers except that, where the fire extinguisher is located inside a cargo compartment, the PBE shall be stowed outside but adjacent to the entrance to that compartment.
- (f) [AOC] The PBE while in use shall not prevent required communication.

7.9.1.14 FIRST AID OXYGEN DISPENSING UNITS

- (a) [AOC] No AOC holder may conduct a passenger carrying operation in a pressurized aeroplane at altitudes above 25,000 feet, when a cabin crew member is required to be carried, unless it is equipped with—
 - (1) Undiluted first-aid oxygen for passengers who, for physiological reasons, may require oxygen following a cabin depressurization; and
 - (2) A sufficient number of dispensing units, but in no case less than two, with a means for cabin crew to use the supply.
- (b) [AOC] The amount of first-aid oxygen required in paragraph (a) for a particular operation and route shall be determined on the basis of—
 - (1) Flight duration after cabin depressurization at cabin altitudes of more than 8,000 feet;
 - (2) An average flow rate of at least 3 litres Standard Temperature Pressure Dry (STPD)/minute/person; and
 - (3) At least 2% of the passengers carried, but in no case for less than one person.
- (c) The amount of first-aid oxygen required for a particular operation shall be determined on the basis of cabin pressure altitudes and flight duration, consistent with the operating procedures established for each operation and route.
- (d) The oxygen equipment provided shall be capable of generating a mass flow to each user of at least four litres per minute, STPD. Means may be provided to decrease the flow to not less than two litres per minutes, STPD, at any altitude.

7.9.1.15 MEGAPHONES

- (a) [AOC] Each person operating a passenger-carrying aeroplane shall have a portable battery-powered megaphone or megaphones readily accessible to the crew members assigned to direct emergency evacuation.
- (b) [AOC] The number and location of megaphones required in paragraph (a) shall be determined as follows:
 - (1) On aeroplanes with a seating capacity of more than 60 and less than 100 passengers, one megaphone shall be located at the most rearward location in the passenger cabin where it would be readily accessible to a normal cabin crew member seat; and
 - (2) On aeroplanes with a seating capacity of more than 99 passengers, two megaphones in the passenger cabin on each aeroplane one installed at the forward end and the other at the most rearward location where it would be readily accessible to a normal cabin crew member seat.
 - (3) For aeroplanes with more than one passenger deck, in all cases when the total passenger seating configuration of a deck is more than 60, at least one megaphone is required on the deck.

7.9.1.16 INDIVIDUAL FLOTATION DEVICES

- (a) Landplanes.
 - (1) [AAC] Landplanes shall carry the equipment prescribed in paragraph 2:
 - (i) When flying en-route over water beyond gliding distance from the shore;
 - (ii) When flying over water at a distance of more than 93 km (50 NM) away from the shore for aircraft capable of maintaining safe altitude after the failure of one engine for two-engine aircraft and the failure of two engines for three or four-engine aircraft.; or
 - (iii) When taking off or landing at an aerodrome where the Authority has determined the take off or approach path is so disposed over water that in the event of a mishap there would be the likelihood of a ditching.
 - (2) [AAC] One life-jacket or equivalent individual flotation device with a means of electric illumination shall be carried for each person on board, stowed in a position easily accessible from the seat or berth of the person for whose use it is provided.
- (b) Seaplanes.
 - (1) [AAC] For all flights, seaplanes shall be equipped with the equipment prescribed in paragraph 2 of (a).

7.9.1.17 LIFE RAFTS

- (a) [AAC] In addition to the equipment prescribed in 7.9.1.16 and 7.9.1.18 of this Part, life saving rafts in sufficient numbers to carry all persons on board shall be installed in:
 - (1) Aeroplanes operated on long range over-water flights, and
 - (2) All other aeroplanes when they are operated over water away from land suitable for making an emergency landing at a distance of more than 185 km (100 NM) in the case of single-engine aeroplanes, and more than 370 km (200 NM) in the case of multi-engine aeroplanes capable of continuing flight with one engine inoperative.
 - (3) Class 1 and 2 helicopters when they are operated over water at a distance from land corresponding to more than 10 minutes at normal cruise speed.
 - (4) Class 3 helicopters when they are operated over water beyond autorotational or safe forced landing distance from land.
- (b) [AOC] An aircraft shall have life saving rafts with a sufficient capacity to carry all persons on board in the event of the loss of one raft of the largest capacity.
- (c) All life saving rafts shall be stowed so as to facilitate their ready use in an emergency.
- (d) Life rafts shall be equipped with the following life sustaining equipment—
 - (1) A electric survivor locator light;
 - (2) A survival kit;
 - (3) A pyrotechnic signalling device; and
 - (4) An ELT (See 7.9.1.5).
- (e) [AOC] In helicopters, life rafts which are not deployable by remote control and which have a mass of more than 40 kg shall be equipped with a means of mechanically assisted deployment.

7.9.1.18 FLOTATION DEVICE FOR HELICOPTER DITCHING

[AAC] All helicopters flying over water at a distance from land corresponding to more than 10 minutes at normal cruise speed in the case of performance Class 1 or 2 helicopters, or flying over water beyond autorotational or safe forced landing distance from land in the case of performance Class 3 helicopters, shall be fitted with a permanent or rapidly deployable means of floatation so as to ensure a safe ditching of the helicopter.

7.9.1.19 LOCATION OF AN AEROPLANE IN DISTRESS

- (a) [AOC] For the purpose of international commercial air transport operations, all aeroplanes of a maximum certificated take-off mass of over 27 000 kg for which the individual certificate of airworthiness is first issued on or after 1 January 2021, shall autonomously transmit information from which a position can be determined by the operator at least once every minute, when in distress, in accordance with Appendix APP: 7.9.1.19.
- (b) The operator shall make position information of a flight in distress available to the appropriate organizations, as established by the State of the Operator.

7.10 MISCELLANEOUS SYSTEMS AND EQUIPMENT

7.10.1.1 SEATS, SAFETY BELTS, AND SHOULDER HARNESSSES

[AAC] Each aircraft used in passenger carrying operations shall be equipped with the following seats, safety belts, and shoulder harnesses that meet the airworthiness requirements for type certification of that aircraft:

- (1) A seat with safety belt for each person on board over an age to be determined by the Department of Civil Aviation, Myanmar; and a restraining belt for each berth on board the aircraft. (The safety belt and restraining belt shall have sufficient adjustment to give adequate restraint to all likely users including children.)
- (2) A safety harness for each flight crewmember seat.
 - (i) The safety harness for each pilot seat shall incorporate a device, which will automatically restrain the occupant's torso in the event of rapid deceleration.
 - (ii) The safety harness for each pilot seat, which includes shoulder straps and a seat belt, should incorporate a device to prevent a suddenly incapacitated pilot from interfering with the flight controls.
- (3) A forward or rearward facing (within 15 degrees of the longitudinal axis of the aeroplane) seat equipped with a safety harness for each cabin crew member station in the passenger compartment.
- (4) The cabin crew member's seats shall be located near floor level and other emergency exits as required by the Authority for emergency evacuation.

7.10.1.2 PASSENGER AND PILOT COMPARTMENT DOORS –AEROPLANES

- (a) [AOC] Pilot compartment door —
 - (1) No person may operate, for the purpose of International Flight, a passenger carrying aeroplane of a maximum certificated take-off mass in excess of 54 500 kg or of a maximum certificated take-off mass in excess of 45 500 kg with a passenger seating capacity greater than 19 or with a passenger seating capacity greater than 60 unless that aircraft is equipped with an approved flight crew compartment door that is designed to resist penetration by small arms fire and grenade shrapnel, and to resist forcible intrusions by unauthorized persons.
 - (2) No person may operate, for the purpose of International Flight, a passenger carrying aeroplane having a certificated takeoff mass of less than 45 500 kg or with a passenger seating capacity of less than 60 unless that aircraft is equipped with an approved flight crew compartment door, where practicable, that is designed to resist penetration by small arms fire and grenade shrapnel, and to resist forcible intrusions by unauthorized persons.
 - (3) In all aeroplanes which are equipped with a flight crew compartment door, means shall be provided by which cabin crew can discreetly notify the flight crew in the event of suspicious activity or security breaches in the cabin.

- (4) Each pilot compartment door shall be capable of being locked and unlocked from either pilot's station.
 - (5) In all aeroplanes which are equipped with a flight crew compartment door in accordance with item (a) (1) and (2), this door shall be closed and locked from the time all external doors are closed following embarkation until any such door is opened for disembarkation, except when necessary to permit access and egress by authorized persons.
 - (6) For aeroplanes operating for the purpose of international commercial air transport operations, a means shall be provided for monitoring from either pilot station the entire door area outside the pilot compartment to identify persons requesting entry and to detect suspicious behaviour or potential threat.
- (b) [AOC] Passenger compartment doors —
- Each passenger compartment door shall have:
- (i) A means for the crew, in an emergency, to unlock each door that leads to a compartment that is normally accessible to passengers and that can be locked by passengers;
 - (ii) A placard on each door used to access a required passenger emergency exit, indicating that such door shall be open during takeoff and landing; and
 - (iii) A means readily available for each crewmember to unlock any door that separates a passenger compartment from another compartment that has emergency exit provisions.

7.10.1.3 PASSENGER INFORMATION SIGNS

- (a) [AOC] No person shall operate a passenger carrying aeroplane with a maximum certificated take-off weight of 5,700 kg (12,500 lbs) or more unless it is equipped with—
- (1) At least one passenger information sign (using either letters or symbols) notifying when smoking is prohibited and one sign (using either letters or symbols) notifying when safety belts should be fastened, which shall, when illuminated, be legible to each person seated in the passenger cabin under all probable conditions of cabin illumination;
 - (2) Signs which notify when safety belts should be fastened and when smoking is prohibited shall be so constructed that the crew can turn them on and off;
 - (3) A sign or placard affixed to each forward bulkhead and each passenger seat back that reads "Fasten Seat Belt While Seated.";
 - (4) Signs or passenger safety instruction cards which notify when and how oxygen equipment is to be used if the carriage of oxygen is required and location and use of life jackets or equivalent individual floating devices where their carriage is required;
- (b) [AAC] Notwithstanding paragraph (a), no person shall operate an aircraft in which all passenger seats are not visible from the flight deck, unless it is equipped with a means of indicating to all passengers and cabin crew when seat belts shall be fastened and when smoking is not allowed.

7.10.1.4 MATERIALS FOR CABIN INTERIORS

- (a) No person shall operate an aircraft unless each compartment used by the crew or passengers meet the following requirements of the State of Design—
- (1) Materials must be at least flash resistant;
 - (2) The wall and ceiling linings and the covering of upholstery, floors and furnishings must be flame resistant;

- (3) Each compartment where smoking is to be allowed must be equipped with self-contained ash trays that are completely removable and other compartments must be placarded against smoking; and
 - (4) Each receptacle for used towels, papers and wastes must be of fire-resistant material and must have a cover or other means of containing possible fires started in the receptacles.
- (b) For aircraft for which the State of Design has developed new airworthiness requirements for cabin interiors since original type certification, the owner of the aircraft shall ensure that all materials that do not meet current State of Design requirement shall have them replaced upon the first major overhaul of the aircraft cabin or refurbishing of the cabin interior with materials that meet the new requirements.

7.10.1.5 MATERIALS FOR CARGO AND BAGGAGE COMPARTMENTS

[AAC] Each cargo compartment shall have ceiling and sidewall liner panels which are constructed of materials which meet the test requirements for flame resistance of cargo compartment liners as prescribed for type certification.

Note: The term "liner" includes any design feature, such as a joint or fastener, which would affect the capability of the liner to safely contain fire.

7.10.1.6 POWER SUPPLY, DISTRIBUTION, AND INDICATION SYSTEM

- (a) [AOC] No AOC holder may operate an aeroplane unless it is equipped with—
- (1) A power supply and distribution system that meets the airworthiness requirements for certification of an aeroplane in the transport category, as specified by the Authority, or
 - (2) A power supply and distribution system that is able to produce and distribute the load for the required instruments and equipment, with use of an auxiliary power supply if any one power source or component of the power distribution system fails.
 - (3) A means for indicating the adequacy of the power being supplied to required flight instruments.
- (b) [AOC] Engine-driven sources of energy, when used, shall be redundant.

7.10.1.7 PROTECTIVE CIRCUIT FUSES

[AOC] No person may operate an aeroplane in which protective fuses are installed unless there are spare fuses available of appropriate ratings for replacement of those accessible in flight.

7.10.1.8 ICING PROTECTION EQUIPMENT

- (a) [AAC] No person may operate an aircraft in expected or actual icing conditions unless it is equipped for the prevention or removal of ice on windshields, wings, control surfaces, empennage, propellers, rotor blades, or other parts of the aircraft where ice formation will adversely affect the safety of the aircraft.
- (b) [AAC] No person may operate an aircraft in expected or actual icing conditions at night unless it is equipped with a means to illuminate or detect the formation of ice. Any illumination that is used shall be of a type that will not cause glare or reflection that would handicap crew members in the performance of their duties.

7.10.1.9 PITOT HEAT AND INDICATION SYSTEMS

- (a) [AAC] No person may operate an aircraft in instrument flight conditions unless it is equipped with a pitot heat system.

- (b) [AOC] No AOC holder may operate an aeroplane equipped with a flight instrument pitot heating system unless the aeroplane is also equipped with an operable pitot heat indication system that complies with the following requirements:
 - (1) The indication provided shall incorporate an amber light that is in clear view of a flight crew member. The indication provided shall be designed to alert the flight crew if either:
 - (i) The pitot heating system is switched "off," and
 - (ii) The pitot heating system is switched "on" and any pitot tube heating element is inoperative, or
 - (2) An integrated flight crew alerting system that will notify the crew if the pitot system is malfunctioning.

7.10.1.10 STATIC PRESSURE SYSTEM

- (a) [AAC] No person may operate an aircraft unless it is equipped with a static pressure system vented to the outside atmospheric pressure so that they will be least affected by airflow variation or moisture or other foreign matter, and installed so as to be airtight except for the vent.
- (b) [AAC] No person may operate an aircraft in IFR or VFR at night unless it is equipped with a static pressure system vented to the outside atmospheric pressure so that they will be least affected by airflow variation or moisture or other foreign matter, and installed so as to be airtight except for the vent and a means of selecting an alternative source of static pressure.
- (c) [AOC] No person may operate an aircraft unless it is equipped with two independent static pressure systems, vented to the outside atmospheric pressure so that they will be least affected by airflow variation or moisture or other foreign matter, and installed so as to be airtight except for the vent.

7.10.1.11 WINDSHIELD WIPERS

[AOC] No AOC holder may operate an aeroplane with a maximum certified take-off mass of more than 5700 kg unless it is equipped at each pilot station with a windshield wiper or equivalent means to maintain a clear portion of the windshield during precipitation.

7.10.1.12 CHART HOLDER

[AOC] No person may operate an aeroplane in commercial air transport operations under single pilot IFR or at night unless a chart holder is installed in an easily readable position in all ambient light conditions and that can be illuminated for night operations.

7.10.1.13 COSMIC RADIATION DETECTION EQUIPMENT

- (a) [AAC] No person shall operate an aeroplane intended to be operated above 15000 m (49,000 ft) unless it is equipped with—
 - (1) an instrument to measure and indicate continuously the dose rate of total cosmic radiation being received (i.e., the total of ionizing and neutron radiation of galactic and solar origin) and the cumulative dose on each flight or
 - (2) A system of on-board quarterly radiation sampling acceptable to the Authority as described in Appendix: APP: 7.10.1.13 of this part.
 - (3) A display unit readily visible to a flight crew member
- (b) The operator shall have the equipment in (a) above calibrated on the basis of assumptions acceptable to DCA, Myanmar.

7.10.1.14 MARITIME SOUND SIGNALLING DEVICE

[AAC] All seaplanes for all flights shall be equipped with equipment for making the sound signals prescribed in the International Regulations for Preventing Collisions at Sea, where applicable.

7.10.1.15 ANCHORS

[AAC] No person shall operate a seaplane unless it is equipped with—

- (1) One anchor, and
- (2) One sea anchor (drogue).

Note: "Seaplanes" includes amphibians operated as seaplanes.

APPENDICES TO MCAR PART-7

APP: 7.2.1.7 CATEGORY II: INSTRUMENTS AND EQUIPMENT APPROVAL AND MAINTENANCE REQUIREMENTS

- (a) **General.** The instruments and equipment required by 7.2.1.7 shall be approved as provided in this appendix before being used in Category II operations. Before presenting an aircraft for approval of the instruments and equipment, it must be shown that since the beginning of the 12th calendar month before the date of submission—
- (1) The ILS localizer and glide slope equipment were bench checked according to the manufacturer's instructions and found to meet those standards specified in RTCA Paper 23-63/DO-177 dated March 14, 1963, "Standards Adjustment Criteria for Airborne Localizer and Glideslope Receivers."
 - (2) The altimeters and the static pressure systems were tested and inspected; and
 - (3) All other instruments and items of equipment specified in 7. 2.1.7 that are listed in the proposed maintenance program were bench checked and found to meet the manufacturer's specifications.
- (b) **Flight control guidance system.** All components of the flight control guidance system shall be approved as installed by the evaluation program specified in paragraph (e) if they have not been approved for Category III operations under applicable type or supplemental type certification procedures. In addition, subsequent changes to make, model, or design of the components must be approved under this paragraph. Related systems or devices, such as the autothrottle and computed missed approach guidance system, shall be approved in the same manner if they are to be used for Category II operations.
- (c) **Radio altimeter.** A radio altimeter must meet the performance criteria of this paragraph for original approval and after each subsequent alteration.
- (1) It shall display to the flight crew clearly and positively the wheel height of the main landing gear above the terrain.
 - (2) It shall display wheel height above the terrain to an accuracy of ± 5 feet or 5 percent, whichever is greater, under the following conditions:
 - (i) Pitch angles of zero to $\pm 5^\circ$ about the mean approach attitude.
 - (ii) Roll angles of zero to 20° in either direction.
 - (iii) Forward velocities from minimum approach speed up to 200 knots.
 - (iv) Sink rates from zero to 15 feet per second at altitudes from 100 to 200 feet.
 - (3) Over level ground, it must track the actual altitude of the aircraft without significant lag or oscillation.
 - (4) With the aircraft at an altitude of 200 feet or less, any abrupt change in terrain representing no more than 10 percent of the aircraft's altitude must not cause the altimeter to unlock, and indicator response to such changes must not exceed 0.1 seconds and, in addition, if the system unlocks for greater changes, it must reacquire the signal in less than 1 second.
 - (5) Systems that contain a push to test feature must test the entire system (with or without an antenna) at a simulated altitude of less than 500 feet.
 - (6) The system must provide to the flight crew a positive failure warning display any time there is a loss of power or an absence of ground return signals within the designed range of operating altitudes.

- (d) **Other instruments and equipment.** All other instruments and items of equipment required by 7.2.1.7 shall be capable of performing as necessary for Category II operations. Approval is also required after each subsequent alteration to these instruments and items of equipment.
- (e) **Evaluation program.**
- (1) *Application.* Approval by evaluation is requested as a part of the application for approval of the Category II manual.
 - (2) *Demonstrations.* Unless otherwise authorized by the Authority, the evaluation program for each aircraft requires the demonstrations specified in this paragraph. At least 50 ILS approaches shall be flown with at least five approaches on each of three different ILS facilities and no more than one half of the total approaches on any one ILS facility. All approaches shall be flown under simulated instrument conditions to a 30 m (100 feet) decision height and 90 percent of the total approaches made shall be successful. A successful approach is one in which—
 - (i) At the 30 m (100 feet) decision height, the indicated airspeed and heading are satisfactory for a normal flare and landing (speed must be ± 5 knots of programmed airspeed, but may not be less than computed threshold speed if autothrottles are used);
 - (ii) The aircraft at the 30 m (100 feet) decision height, is positioned so that the cockpit is within, and tracking so as to remain within, the lateral confines of the runway extended;
 - (iii) Deviation from glide slope after leaving the outer marker does not exceed 50 percent of full-scale deflection as displayed on the ILS indicator;
 - (iv) No unusual roughness or excessive attitude changes occur after leaving the middle marker; and
 - (v) In the case of an aircraft equipped with an approach coupler, the aircraft is sufficiently in trim when the approach coupler is disconnected at the decision height to allow for the continuation of a normal approach and landing.
 - (3) *Records.* During the evaluation program the following information shall be maintained by the applicant for the aircraft with respect to each approach and made available to the Authority upon request:
 - (i) Each deficiency in airborne instruments and equipment that prevented the initiation of an approach.
 - (ii) The reasons for discontinuing an approach, including the altitude above the runway at which it was discontinued.
 - (iii) Speed control at the 30 m (100 feet) DH if auto throttles are used.
 - (iv) Trim condition of the aircraft upon disconnecting the auto coupler with respect to continuation to flare and landing.
 - (v) Position of the aircraft at the middle marker and at the decision height indicated both on a diagram of the basic ILS display and a diagram of the runway extended to the middle marker. Estimated touchdown point shall be indicated on the runway diagram.
 - (vi) Compatibility of flight director with the auto coupler, if applicable.
 - (vii) Quality of overall system performance.
 - (4) *Evaluation.* A final evaluation of the flight control guidance system is made upon successful completion of the demonstrations. If no hazardous tendencies have been displayed or are otherwise known to exist, the system is approved as installed.

- (f) Each maintenance program for Category II instruments and equipment shall contain the following:
- (1) A list of each instrument and item of equipment specified in 7.2.1.7 that is installed in the aircraft and approved for Category II operations, including the make and model of those specified in 7.2.1.7 (1).
 - (2) A schedule that provides for the performance of inspections under subparagraph (5) of this paragraph within 3 calendar months after the date of the previous inspection. The inspection shall be performed by a person authorized by MCAR Part 21, except that each alternate inspection may be replaced by a functional flight check. This functional flight check shall be performed by a pilot holding a Category II pilot authorization for the type aircraft checked.
 - (3) A schedule that provides for the performance of bench checks for each listed instrument and item of equipment that is specified in 7.2.1.7 (1) within 12 calendar months after the date of the previous bench check.
 - (4) A schedule that provides for the performance of a test and inspection of each static pressure system within 12 calendar months after the date of the previous test and inspection.
 - (5) The procedures for the performance of the periodic inspections and functional flight checks to determine the ability of each listed instrument and item of equipment specified in 7.2.1.7 (1) to perform as approved for Category II operations including a procedure for recording functional flight checks.
 - (6) A procedure for assuring that the pilot is informed of all defects in listed instruments and items of equipment.
 - (7) A procedure for assuring that the condition of each listed instrument and item of equipment upon which maintenance is performed is at least equal to its Category II approval condition before it is returned to service for Category II operations.
 - (8) A procedure for an entry in the maintenance records that shows the date, airport, and reasons for each discontinued Category II operation because of a malfunction of a listed instrument or item of equipment.
- (g) **Bench check.** A bench check required by this section shall comply with this paragraph.
- (1) Except as specified in paragraph (g)(2) of this subsection, it shall be performed by a certificated repair station holding one of the following ratings as appropriate to the equipment checked:
 - (i) An instrument rating.
 - (ii) An avionics rating.
 - (2) It shall be performed by a certificated air operator on aircraft identified in its approved specific operating provisions with the approved authorizations to perform maintenance and approve for return to service its own aircraft maintained under a continuous maintenance program under an equivalent system identified in MCAR Part 1.
 - (3) It shall consist of removal of an instrument or item of equipment and performance of the following:
 - (i) A visual inspection for cleanliness, impending failure, and the need for lubrication, repair, or replacement of parts;
 - (ii) Correction of items found by that visual inspection; and
 - (iii) Calibration to at least the manufacturer's specifications unless otherwise specified in the approved Category II manual for the aircraft in which the instrument or item of equipment is installed.

- (h) Extensions. After the completion of one maintenance cycle of 12 calendar months, a request to extend the period for checks, tests, and inspections is approved if it is shown that the performance of particular equipment justifies the requested extension.

APP: 7.4.1.3 REDUCED VERTICAL SEPARATION MINIMUM—ALTIMETRY SYSTEM PERFORMANCE REQUIREMENTS FOR OPERATIONS IN RVSM AIRSPACE

- (a) In respect of groups of aeroplanes that are nominally of identical design and build with respect to all details that could influence the accuracy of height-keeping performance, the height-keeping performance capability shall be such that the total vertical error (TVE) for the group of aeroplanes shall have a mean no greater than 25 m (80 ft) in magnitude and shall have a standard deviation no greater than $28 - 0.013z^2$ for $0 \leq z \leq 25$ when z is the magnitude of the mean TVE in metres, or $92 - 0.004z^2$ for $0 \leq z \leq 80$ where z is in feet. In addition, the components of TVE shall have the following characteristics:
 - (1) the mean altimetry system error (ASE) of the group shall not exceed 25 m (80 ft) in magnitude;
 - (2) the sum of the absolute value of the mean ASE and of three standard deviations of ASE shall not exceed 75 m (245 ft); and
 - (3) the differences between cleared flight level and the indicated pressure altitude actually flown shall be symmetric about a mean of 0 m, with a standard deviation no greater than 13.3 m (43.7 ft), and in addition, the decrease in the frequency of differences with increasing difference magnitude shall be at least exponential.
- (b) In respect of aeroplanes for which the characteristics of the airframe and altimetry system fit are unique and so cannot be classified as belonging to a group of aeroplanes encompassed by paragraph 1, the height-keeping performance capability shall be such that the components of the TVE of the aeroplane have the following characteristics:
 - (1) the ASE of the aeroplane shall not exceed 60 m (200 ft) in magnitude under all flight conditions; and
 - (2) the differences between the cleared flight level and the indicated pressure altitude actually flown shall be symmetric about a mean of 0 m, with a standard deviation no greater than 13.3 m (43.7 ft), and in addition, the decrease in the frequency of differences with increasing difference magnitude shall be at least exponential.

APP: 7.8.1.1 FLIGHT DATA RECORDERS (FDR) AND AIRCRAFT DATA RECORDING SYSTEMS (ADRS)

Table A-1. Parameter Characteristics for Flight Data Recorders - Aeroplanes

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
1	Time (UTC when available, otherwise relative time count or GNSS sync)	24 hours	4	±0.125% per hour	1 second
2	Pressure-altitude—	-300 m (-1 000 ft) to maximum certificated altitude of aircraft + 1 500 m (+ 5 000 ft)	1	±30 m to ±200 m (±100 ft to ±700 ft)	1.5 m (5 ft)

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (<i>seconds</i>)	Accuracy limits (<i>sensor input compared to FDR read-out</i>)	Recording resolution
3	Indicated airspeed or calibrated airspeed	95 km/h (50 kt) to max V _{So} (Note 1) V _{So} to 1.2 V _D (Note 2)	1	±5% ±3%	1 kt (0.5 kt recommended)
4	Heading (primary flight crew reference)	360 degrees	1	±2°	0.5°
5	Normal acceleration (Note 8)	-3 g to +6 g	0.0625	±1% of maximum range excluding datum error of ±5%	0.004 g
6	Pitch attitude	±75° or usable range whichever is greater	±0.25	±2°	0.5°
7	Roll attitude	±180°	±0.25	±2°	0.5°
8	Radio transmission keying	On-off one discrete)	1		
9	Power on each engine (Note 3)	Full range	1 (per engine)	±2%	0.2% of full range or the resolution required to operate the aircraft
10*	Trailing edge flap and cockpit control selection	Full range or each discrete position	2	±5% or as pilot's indicator	0.5% of full range or the resolution required to operate the aircraft
11*	Leading edge flap and cockpit control selection	Full range or each discrete position	2	±5% or as pilot's indicator	0.5% of full range or the resolution required to operate the aircraft
12*	Thrust reverser position	Stowed, in transit, and reverse	1 (per engine)		
13*	Ground spoiler/speed brake selection (selection and position)	Full range or each discrete position	1	±2% unless higher accuracy uniquely required	0.2% of full range
14	Outside air temperature	Sensor range	2	±2° C	0.3°C
15*	Autopilot/auto throttle/AFCS mode and engagement status	A suitable combination of discretes	1		
16	Longitudinal acceleration (Note 8)	+/-1 g	0.0625	±0.015 g excluding a datum error of ±0.05 g	0.004 g
17	Lateral acceleration (Note 8)	±1 g	0.0625	±0.015 g excluding a datum error of ±0.05 g	0.004 g

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (<i>seconds</i>)	Accuracy limits (<i>sensor input compared to FDR read-out</i>)	Recording resolution
18	Pilot input and/or control surface position-primary controls (pitch, roll, yaw) (Note 4) (Note 8)	Full range	0.125	±2° unless higher accuracy uniquely required	0.2% of full range or as installed
19	Pitch trim position	Full range	1	±3% unless higher accuracy uniquely required	0.3% of full range or as installed
20*	Radio altitude--	-6 m to 750 m (-20 ft to 2 500 ft)	1	±0.6 m (±2 ft) or ±3% whichever is greater below 150 m (500 ft) and ±5% above 150 m (500 ft)	0.3 m (1 ft) below 150 m (500 ft); 0.3 m (1 ft) + 0.5% of full range above 150 m (500 ft)
21*	Vertical beam deviation (ILS/GNSS/GLS glide path, MLS elevation, IRNAV/IAN vertical deviation)	Signal range	1	±3%	0.3% of full range
22*	Horizontal beam deviation (ILS/GNSS/GLS localizer, MLS azimuth, IRNAV/IAN lateral deviation)	Signal range	1	±3%	0.3% of full range
23	Marker beacon passage	Discrete	1		
24	Master warning	Discrete	1		
25	NAV receiver frequency selection (Note 5)	Full range	4	As installed	
26*	DME 1 and 2 distance (includes Distance to runway threshold (GLS) and Distance to missed approach point (IRNAV/IAN) (Notes 5 and 6)	0 – 370 km (0-200 NM)	4	As installed	1852 m (1 NM)
27	Air/ground status	Discrete	1		
28*	GPWS/TAWS/GCAS status (selection of terrain display mode including pop-up display status) and (Terrain alerts, both cautions and warnings, and advisories) and (on/off switch position)	Discrete	1		
29*	Angle of attack	Full range	0.5	As installed	0.3% of full range
30*	Hydraulics, each system (low pressure)	Discrete	2		0.5% of full range

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
31*	Navigation data (latitude/longitude, ground speed and drift angle) (Note 7)	As installed	1	As installed	
32*	Landing gear and gear selector position	Discrete	4	As installed	
33*	Groundspeed	As installed	1	Data should be obtained from the most accurate system	1 kt
34	Brakes (left and right brake pressure, left and right brake pedal position)	(Maximum metered brake range, discretized or full range)	1	1±5%	2% of full range
35*	Additional engine parameters (EPR, N1, indicated vibration level, N2, EGT, fuel flow, fuel cut-off lever position, N3, engine fuel metering valve position) (Note 9)	As installed	Each engine each second	As installed	2% of full range
36*	TCAQS/ACAS (traffic alert and collision avoidance system)	Discretized	1	As installed	
37*	Windshear warning	Discrete	1	As installed	
38*	Selected barometric setting (pilot, co-pilot)	As installed	64	As installed	0.1 mb (0.01 in-Hg)
39*	Selected altitude (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
40*	Selected speed (all pilot selectable modes of operations)	As installed	1	As installed	Sufficient to determine crew selection
41*	Selected Mach (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
42*	Selected vertical speed (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
43*	Selected heading (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
44*	Selected flight path (all pilot selectable modes of operation) (course/DSTRK, path angle; final approach path (IRNAV/IAN))		1	As installed	
45*	Selected Decision Height	As installed	64	As installed	Sufficient to

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
					determine crew selection
46*	EFIS display format (pilot, co-pilot)	Discrete(s)	4	As installed	
47*	Multi-function/engine/alerts display format	Discrete(s)	4	As installed	
48*	AC electrical bus status	Discrete(s)	4	As installed	
49*	DC electrical bus status	Discrete(s)	4	As installed	
50*	Engine bleed valve position	Discrete(s)	4	As installed	
51*	APU bleed valve position	Discrete(s)	4	As installed	
52*	Computer failure	Discrete(s)	4	As installed	
53*	Engine thrust command	As installed	2	As installed	
54*	Engine thrust target	As installed	4	As installed	2% of full range
55*	Computed centre of gravity	As installed	64	As installed	1% of full range
56*	Fuel quantity in CG trim tank	As installed	64	As installed	1% of full range
57*	Head up display in use	As installed	4	As installed	
58*	Para visual display on/off	As installed	1	As installed	
59*	Operational stall protection, stick shaker and pusher activation	As installed	1	As installed	
60*	Primary navigation system reference (GNSS, INS, VOR/DME, MLS, Loran C, localizer glideslope)	As installed	4	As installed	
61*	Ice detection	As installed	4	As installed	
62*	Engine warning each engine vibration	As installed	1	As installed	
63*	Engine warning each engine over temperature	As installed	1	As installed	
64*	Engine warning each engine oil pressure low	As installed	1	As installed	
65*	Engine warning each engine over speed	As installed	1	As installed	
66*	Yaw Trim Surface Position	Full range	2	±3% unless higher accuracy uniquely required	0.3% of full range
67*	Roll Trim Surface Position	Full range	2	±3% unless higher accuracy uniquely required	0.3% of full range
68*	Yaw or sideslip angle	Full range	1	±5%	0.5°
69*	De-icing and/or anti-icing systems selection	Discrete(s)	4		
70*	Hydraulic pressure (each system)	Full range	2	±5%	100 psi
71*	Loss of cabin pressure	Discrete	1		
72*	Cockpit trim control input	Full range	1	±5%	0.2% of full

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
	position Pitch				range or as installed
73*	Cockpit trim control input position Roll	Full range	1	±5%	0.2% of full range or as installed
74*	Cockpit trim control input position Yaw	Full range	1	±5%	0.2% of full range or as installed
75*	All cockpit flight control input forces (control wheel, control column, rudder pedal)	Full range (±311 N (±70 lbf), ±378 N (±85 lbf), ±734 N (±165 lbf))	1	±5%	0.2% of full range or as installed
76*	Event marker	Discrete	1		
77*	Date	365 days	64		
78*	ANP or EPE or EPU	As installed	4	As installed	
79*	Cabin pressure altitude (Note 10)	As installed (0 ft to 40 000 ft recommended)	1	As installed	100 ft
80*	Aeroplane computed weight (Note 10)	As installed	64	As installed	1% of full range
81*	Flight director command (Note 10)	Full range	1	± 2°	0.5°
82*	Vertical speed (Note 10)	As installed	0.25	As installed (32 ft/min recommended)	16 ft/min

Notes.—

1. V_{So} stalling speed or minimum steady flight speed in the landing configuration is in Section “Abbreviations and Symbols”.
2. V_D design diving speed.
3. Record sufficient inputs to determine power.
4. For aeroplanes with control systems in which movement of a control surface will back drive the pilot’s control, “or” applies. For aeroplanes with control systems in which movement of a control surface will not back drive the pilot’s control, “and” applies. In aeroplanes with split surfaces, a suitable combination of inputs is acceptable in lieu of recording each surface separately. In aeroplanes with independent pilot input on primary controls, each pilot input on primary controls needs to be recorded separately.
5. If signal available in digital form.
6. Recording of latitude and longitude from INS or other navigation system is a preferred alternative.
7. If signals readily available.
8. It is not intended that aeroplanes issued with an individual certificate of airworthiness before 1 January 2016 be modified to meet the measurement range, maximum sampling and recording interval, accuracy limits or recording resolution description detailed in this Appendix.
9. Engine fuel metering valve position: Application for type certification is submitted to a Contracting State on or after 1 January 2023.
10. Application for type certification submitted to a Contracting State on or after 1 January 2023.

Table A-2. Description of Applications for Data Link Recorders

Item No.	Application Type	Application Description	Recording Content
1	Data link Initiation	This includes any applications used to logon to or initiate data link service. In FANS-1/A and ATN, these are ATS Facilities Notification (AFN) and Context Management (CM) respectively.	C
2	Controller/Pilot Communication	This includes any application used to exchange requests, clearances, instructions and reports between the flight crew and controllers on the ground. In FANS-1/A and ATN, this includes the CPDLC application. It also includes applications used for the exchange of oceanic (OCL) and departure clearances (DCL) as well as data link delivery of taxi clearances.	C
3	Addressed Surveillance	This includes any surveillance application in which the ground sets up contracts for delivery of surveillance data. In FANS-1/A and ATN, this includes the Automatic Dependent Surveillance (ADS-C) application. Where parametric data are reported within the message they shall be recorded within the message they shall be recorded unless data from the same source are recorded on the FDR.	C
4	Flight Information	This includes any service used for delivery of flight information to specific aircraft. This includes, for example, D-METAR, D-ATIS, D-NOTAM and other textual data link services.	C
5	Aircraft Broadcast Surveillance	This includes Elementary and Enhanced Surveillance Systems, as well as ADS-B output data. Where parametric data sent by the aircraft are reported within the message they shall be recorded unless data from the same sources are recorded on the FDR.	M*
6	Aeronautical Operational Control Data	This includes any application transmitting or receiving data used for aeronautical operational control purposes (per the ICAO definition of operational control).	M*

*Key:**C Complete contents recorded.**M Information that enables correlation to any associated records stored separately from the aircraft.*** Applications to be recorded only as far as is practicable given the architecture of the system.*

Table A-3. Parameter Characteristics for Aircraft Data Recording Systems - Aeroplanes

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
1	Heading (Magnetic or True)	R*	±180°	1	±2°	0.5°	*Heading is preferred, if not available, yaw rate shall be recorded
2	Pitch attitude	E*	±90°	0.25	±2°	0.5°	*Pitch attitude is preferred, if not available, pitch rate shall be recorded
3	Roll attitude	E*	±180°	0.25	±2°	0.5°	* Roll attitude is preferred, if not available, roll rate shall be recorded
4	Yaw rate	E*	±300°/s	0.25	±1% + drift of 360°/hr	2°/s	
5	Pitch rate	E*	±300°/s	0.25	±1% + drift of 360°/hr	2°/s	
6	Roll rate	E*	±300°/s	0.25	±1% + drift of 360°/hr	2°/s	
7	Positioning system: latitude/longitude	E	Latitude: ±90°; Longitude: ±180°	2 (1 if available)	As installed (0.00015° recommended)	0.00005°	--
8	Positioning system: estimated error	E*	Available range	2 (1 if available)	As installed	As installed	*If available
9	Positioning system: altitude	E	-300 m (-1 000 ft) to maximum certificated altitude of aeroplane +1 500 m (5 000 ft)	2 (1 if available)	As installed (±15 m (±50 ft) recommended)	1.5 m (5 ft)	--
10	Positioning system: time	E	24 hours	1	±0.5 second	0.1 second	*UTC time preferred where available
11	Positioning system: ground speed	E	0-1 000 kt	2 (1 if available)	As installed (±5 kt recommended)	1 kt	--
12	Positioning system: Track	E	0-360°	2 (1 if available)	As installed (±2° recommended)	0.5°	--
13	Normal acceleration	E	-3 g to + 6 g(*)	0.25 (0.125 if available)	As installed (±0.09 g excluding a datum error of ±0.45 g recommended)	0.004 g	--
14	Longitudinal acceleration	E	±1 g(*)	0.25 (0.125 if available)	As installed (±0.015 g excluding a	0.004 g	--

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
					datum error of ± 0.05 g recommended)		
15	Lateral acceleration	E	± 1 g(*)	0.25 (0.125 if available)	As installed (± 0.015 g excluding a datum error of ± 0.05 g recommended)	0.004 g	--
16	External static pressure (or pressure altitude)	R	34.4 mb (3.44 in-Hg) to 310.2 mb (31.03 in-Hg) or available sensor range	1	As installed (± 1 mb (0.1 in-Hg) or ± 30 m (± 100 ft) to ± 210 m (± 700 ft) recommended)	0.1 mb (0.01 in-Hg) or 1.5 m (5 ft)	--
17	Outside air temperature (or total air temperature)	R	-50° to $+90^{\circ}$ C or available sensor range	2	As installed ($\pm 2^{\circ}$ C recommended)	1 $^{\circ}$ C	--
18	Indicated air speed	R	As the installed pilot display measuring system or available sensor range	1	As installed ($\pm 3\%$ recommended)	1 kt (0.5 kt recommended)	--
19	Engine RPM	R	Full range including overspeed condition	Each engine each second	As installed	0.2% of full range	--
20	Engine oil pressure	R	Full range	Each engine each second	As installed (5% of full range)	2% of full range	--
21	Engine oil temperature	R	Full range	Each engine each second	As installed (5% of full range)	2% of full range	--
22	Fuel flow or pressure	R	Full range	Each engine each second	As installed	2% of full range	--
23	Manifold pressure	R	Full range	Each engine each second	As installed	0.2% of full range	--

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
24	Engine thrust/ power/ torque parameters required to determine propulsive thrust/ power*	R	Full range	Each engine each second	As installed	0.1% of full range	*Sufficient parameters e.g. EPRN/N1 or torque/Np as appropriate to the particular engine shall be recorded to determine power in both normal and reverse thrust. A margin for possible overspeed should be provided.
25	Engine gas generator speed (Ng)	R	0-150%	Each engine each second	As installed	0.2% of full range	--
26	Free power turbine speed (Nf)	R	0-150%	Each engine each second	As installed	0.2% of full range	--
27	Coolant temperature	R	Full range	1	As installed ($\pm 5^{\circ}\text{C}$ recommended)	1 $^{\circ}\text{C}$	--
28	Main voltage	R	Full range	Each engine each second	As installed	1 Volt	--
29	Cylinder head temperature	R	Full range	Each cylinder each second	As installed	2% of full range	--
30	Flaps position	R	Full range or each discrete position	2	As installed	0.5 $^{\circ}$	--
31	Primary flight control surface position	R	Full range	0.25	As installed	0.2% of full range	--
32	Fuel quantity	R	Full range	4	As installed	1% of full range	--
33	Exhaust gas temperature	R	Full range	Each engine each second	As installed	2% of full range	--
34	Emergency voltage	R	Full range	Each engine each second	As installed	1 Volt	--
35	Trim surface position	R	Full range or each discrete	1	As installed	0.3% of full range	--

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
			position				
36	Landing gear position	R	Each discrete position*	Each gear every 2 seconds	As installed	--	*Where available, record up-and-locked and down-and-locked position
37	Novel/ unique aircraft features	R	As required	As required	As required	As required	--

Table A-4. Parameter Characteristics for Flight Data Recorders – Helicopters

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
1	Time (UTC when available, otherwise relative time count or GNSS time sync)	24 hours	4	±0.125% per hour	1s
2	Pressure-altitude--	-300 m (-1 000 ft) to maximum certificated altitude of aircraft +1 500 m (+5 000 ft)	1	±30 m to ±200 m (±100 ft to ±700 ft)	1.5 m (5 ft)
3	Indicated airspeed	As the installed pilot display measuring system	1	±3%	1 kt
4	Heading	360 degrees	1	± 2°	0.5°
5	Normal acceleration--	-3 g to +6 g	0.125	±0.09 g excluding a datum error of ±0.045g	0.004 g
6	Pitch attitude	±75 ° or 100% of usable range whichever is greater	0.5	± 2°	0.5°
7	Roll attitude	±180°	0.5	±2°	0.5°
8	Radio transmission keying	On-off (one discrete)	1	---	---
9	Power on each engine	Full range	1 (per engine)	±2%	0.1% of full range
10	Main rotor :				
	Main rotor speed	50-130%	0.51	±2%	0.3% of full range
	Rotor brake	Discrete		---	---

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
11	Pilot input and/or control surface position-primary controls (Collective pitch, longitudinal cyclic pitch, lateral cyclic pitch, tail rotor pedal)	Full range	0.5 (0.25 recommended)	±2% unless higher accuracy uniquely required.	0.5% of operating range
12	Hydraulics, each system (low pressure and selection)	Discrete	1	---	---
13	Outside air temperature	Sensor range	2	±2°C	0.3°C
14*	Autopilot/auto throttle/AFCS mode and engagement status	A suitable combination of discrettes	1	---	---
15*	Stability augmentation system engagement	Discrete	1	---	---
16*	Main gearbox oil pressure	As installed	1	As installed	6.895 kN/m ² (1 psi)
17*	Main gearbox oil temperature	As installed	2	As installed	1°C
18	Yaw acceleration (or yaw rate)	±400°/second	0.25	±1.5% max range excluding datum error of ±5%	±2°/s
19*	Sling load force	0-200% of certified load	0.5	±3% of max range	0.5% for maximum certified load
20	Longitudinal acceleration	±1 g	0.25	±0.015 g excluding datum error of ± 0.05 g	0.0004 g
21	Lateral acceleration	±1 g	0.25	±0.015 g excluding datum error of ± 0.05 g	0.0004 g
22*	Radio altitude--	-6 m to 750 m (-20 ft to 2 500 ft)	1	±0.6 m (±2 ft) or ±3% whichever is greater below 150 m (500 ft) and ±5% above 150 m (500 ft)	0.3 m (1ft) below 150 m (500 ft), 0.3 m (1 ft) + 0.5% of full range above 150 m (500 ft)
23*	Vertical beam deviation	Signal range	1	±3%	0.3% of full range
24*	Horizontal beam deviation	Signal range	1	±3%	0.3% of full range
25	Marker beacon passage	Discrete	1	---	---
26	Warnings	Discrete(s)	1	---	---
27	Each navigation receiver frequency selection	Sufficient to determine selected frequency	4	As installed	----
28*	DME 1 and 2 distance	0-370 km (0-200 NM)	4	As installed	1.852 m (1 NM)
29*	Navigation data (latitude/longitude,	As installed	2	As installed	As installed

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
	ground speed, drift angle, wind speed, wind direction)				
30*	Landing gear or gear selector position	Discrete	4	---	---
31*	Engine exhaust gas temperature (T4)	As installed	1	As installed	
32*	Turbine inlet temperature (TIT/ITT)	As installed	1	As installed	
33*	Fuel contents	As installed	4	As installed	
34*	Altitude rate	As installed	1	As installed	
35*	Ice detection	As installed	4	As installed	
36*	Helicopter health and usage monitor system	As installed	-	As installed	
37	Engine control modes	Discrete	1	----	----
38*	Selected barometric setting (pilot and co-pilot)	As installed	64 (4 recommended)	As installed	0.1 mb (0.01 in Hg)
39*	Selected altitude (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
40*	Selected speed (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
41*	Selected Mach (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
42*	Selected vertical speed (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
43*	Selected heading (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
44*	Selected flight path (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
45*	Selected decision height	As installed	4	As installed	Sufficient to determine crew selection
46*	EFIS display format (pilot and co-pilot)	Discrete(s)	4	---	---
47*	Multi-function/engine/alerts display format	Discrete(s)	4	---	---
48*	Event marker	Discrete	1	---	---
49*	GPWS/TAWS/GCAS status (selection of terrain display mode including pop-up)	Discrete(s)	1	As installed	

Serial number	Parameter	Measurement range	Maximum Sampling and Recording interval (seconds)	Accuracy limits (sensor input compared to FDR read-out)	Recording resolution
	display status) and (terrain alerts, both cautions and warnings, and advisories) and (on/off switch position) and (operational status) (Note)				
50*	TCAS/ACAS (traffic alert and collision avoidance system) and (operational status) (Note)	Discrete(s)	1	As installed	
51*	Primary flight controls – pilot input forces (Note)	Full range	0.125 (0.0625 recommended)	± 3% unless higher accuracy is uniquely required	0.5% of operating range
52*	Computed centre of Gravity (Note)	As installed	64	As installed	1% of full range
53*	Helicopter computed Weight (Note)	As installed	64	As installed	1% of full range

Note : Application for type certification is submitted to a Contracting State on or after 1 January 2023

Table A-5. Parameter Characteristics for Aircraft Data Recording Systems - Helicopters

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
1	Heading (Magnetic or True)	R*	±180°	1	±2°	0.5°	*Heading is preferred, if not available, yaw rate shall be recorded
2	Pitch attitude	E*	±90°	0.25	±2°	0.5°	*Pitch attitude is preferred, if not available, pitch rate shall be recorded
3	Roll attitude	E*	±180°	0.25	±2°	0.5°	* Roll attitude is preferred, if not available, roll rate shall be recorded
4	Yaw rate	E*	±300°/s	0.25	±1% + drift of 360°/hr	2°/s	
5	Pitch rate	E*	±300°/s	0.25	±1% + drift of 360°/hr	2°/s	
6	Roll rate	E*	±300°/s	0.25	±1% + drift of 360°/hr	2°/s	

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
7	Positioning system: latitude/longitude	E	Latitude: $\pm 90^\circ$; Longitude: $\pm 180^\circ$	2 (1 if available)	As installed (0.00015° recommended)	0.00005°	--
8	Positioning system: estimated error	E*	Available range	2 (1 if available)	As installed	As installed	*If available
9	Positioning system: altitude	E	-300 m (-1 000 ft) to maximum certificated altitude of aeroplane +1 500 m (5 000 ft)	2 (1 if available)	As installed (± 15 m (± 50 ft) recommended)	1.5 m (5 ft)	--
10	Positioning system: time	E	24 hours	1	± 0.5 second	0.1 second	*UTC time preferred where available
11	Positioning system: ground speed	E	0-1 000 kt	2 (1 if available)	As installed (± 5 kt recommended)	1 kt	--
12	Positioning system: Track	E	0-360°	2 (1 if available)	As installed ($\pm 2^\circ$ recommended)	0.5°	--
13	Normal acceleration	E	-3 g to + 6 g(*)	0.25 (0.125 if available)	As installed (± 0.09 g excluding a datum error of ± 0.05 g recommended)	0.004 g	--
14	Longitudinal acceleration	E	± 1 g(*)	0.25 (0.125 if available)	As installed (± 0.015 g excluding a datum error of ± 0.05 g recommended)	0.004 g	--
15	Lateral acceleration	E	± 1 g	0.25 (0.125 if available)	As installed (± 0.015 g excluding a datum error of ± 0.05 g recommended)	0.004 g	--
16	External static pressure (or pressure altitude)	R	34.4 hPa (1.02 in-Hg) to 310.2 hPa (9.16 in-Hg) or available sensor range	1	As installed (± 1 hPa (0.3 in-Hg) or ± 30 m (± 100 ft) to ± 210 m (± 700 ft) recommended)	0.1hPa (0.03 in-Hg) or 1.5 m (5 ft)	--
17	Outside air temperature (or total air temperature)	R	-50° to +90°C or available sensor	2	As installed ($\pm 2^\circ$ C recommended)	1°C	--

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
			range				
18	Indicated air speed	R	As the installed pilot display measuring system or available sensor range	1	As installed ($\pm 3\%$ recommended)	1 kt (0.5 kt recommended)	--
19	Main rotor speed (Nr)	R	50% to 130% or available sensor range	0.5	As installed	0.3% of full range	
20	Engine RPM(*)	R	Full range including overspeed condition	Each engine each second	As installed	0.2% of full range	*For piston- engine Helicopters
21	Engine oil pressure	R	Full range	Each engine each second	As installed (5% of full range)	2% of full range	--
22	Engine oil temperature	R	Full range	Each engine each second	As installed (5% of full range)	2% of full range	--
23	Fuel flow or pressure	R	Full range	Each engine each second	As installed	2% of full range	--
24	Manifold pressure(*)	R	Full range	Each engine each second	As installed	0.2% of full range	*For piston- engine Helicopters
25	Engine thrust/ power/ torque parameters required to determine propulsive thrust/ power*	R	Full range	Each engine each second	As installed	0.1% of full range	*Sufficient parameters e.g. EPRN/N1 or torque/Np as appropriate to the particular engine shall be recorded to determine power in both normal and reverse thrust. A margin for possible overspeed should be provided only for turbine-engined helicopter
26	Engine gas generator speed (Ng)(*)	R	0-150%	Each engine each second	As installed	0.2% of full range	* Only for turbine-engined helicopter

No.	Parameter Name	Parameter Category	Minimum Recording Range	Maximum Recording Interval in Seconds	Minimum Recording Accuracy	Minimum Recording Resolution	Remarks
27	Free power turbine speed (Nf)(*)	R	0-150%	Each engine each second	As installed	0.2% of full range	* Only for turbine-engined helicopter
28	Collective Pitch	R	Full range	0.5	As installed	0.1% of full range	
29	Coolant temperature(*)	R	Full range	1	As installed ($\pm 5^{\circ}\text{C}$ recommended)	1 $^{\circ}\text{C}$	* Only for piston-engined helicopter
30	Main voltage	R	Full range	Each engine each second	As installed	1 Volt	--
31	Cylinder head temperature(*)	R	Full range	Each cylinder each second	As installed	2% of full range	* Only for piston-engined helicopter
32	Fuel quantity	R	Full range	4	As installed	1% of full range	--
33	Exhaust gas temperature	R	Full range	Each engine each second	As installed	2% of full range	--
34	Emergency voltage	R	Full range	Each engine each second	As installed	1 Volt	--
35	Trim surface position	R	Full range or each discrete position	1	As installed	0.3% of full range	--
36	Landing gear position	R	Each discrete position*	Each gear every 2 seconds	As installed	--	*Where available, record up-and-locked and down-and-locked position
37	Novel/ unique aircraft features	R	As required	As required	As required	As required	--

APP: 7.8.1.4 FLIGHT CREW-MACHINE INTERFACE RECORDINGS/ AN AIRBORNE IMAGE RECORDER (AIR)**(a) Start and Stop Logic**

The AIR or AIRS shall start to record prior to the aeroplane moving under its own power and record continuously until the termination of the flight when the aeroplane is no longer capable of moving under its own power. In addition, depending on the availability of electrical power, the AIR or AIRS shall start to record as early as possible during the cockpit checks prior to engine start at the beginning of the flight until the cockpit checks immediately following engine shutdown at the end of the flight.

(b) Classes

(1) A Class A AIR or AIRS captures the general cockpit area in order to provide data supplemental to conventional flight recorders.

Note 1.— To respect crew privacy, the cockpit area view may be designed as far as practical to exclude the head and shoulders of crew members whilst seated in their normal operating position.

Note 2.— There are no provisions for Class A AIR or AIRS in this document.

(2) A Class B AIR or AIRS captures data link message displays.

(3) A Class C AIR or AIRS captures instruments and control panels.

Note.— A Class C AIR or AIRS may be considered as a means for recording flight data where it is not practical or is prohibitively expensive to record on an FDR or an ADRS, or where an FDR is not required.

(c) Applications to be Recorded

(1) The operation of switches and selectors and the information displayed to the flight crew from electronic displays shall be captured by sensors or other electronic means.

(2) The recording of operation of switches and selectors by the flight crew shall include the following:

- (i) any switch or selector that will affect the operation and the navigation of the aircraft; and
- (ii) selection of normal and alternate systems.

(3) The recording of the information displayed to the flight crew from electronic displays shall include the following:

- (i) primary flight and navigation displays;
- (ii) aircraft system monitoring displays;
- (iii) engine indication displays;
- (iv) traffic, terrain, and weather displays;
- (v) crew alerting systems displays;
- (vi) stand-by instruments; and
- (vii) installed EFB to the extent it is practical.

(4) If image sensors are used, the recording of such images shall not capture the head and shoulders of the flight crew members while seated in their normal operating position.

APP: 7.9.1.2 EMERGENCY EXIT EQUIPMENT - PASSENGERS

- (a) The emergency exit equipment for aeroplanes in 7.9.1.2(a) shall meet the following requirements.
- (1) The assisting means for a floor level emergency exit shall meet the requirements under which the aeroplane was type certified.
 - (2) The location of each passenger emergency exit shall be—
 - (i) Recognisable from a distance equal to the width of the cabin.
 - (ii) Indicated by a sign visible to occupants approaching along the main passenger aisle.
 - (3) There shall be an emergency exit locating sign—
 - (i) Above the aisle near each over-the-wing passenger emergency exit, or at another ceiling location if it is more practical because of low headroom;
 - (ii) Next to each floor level passenger emergency exit, except that one sign may serve two such exits if they both can be seen readily from that sign; and
 - (iii) On each bulkhead or divider that prevents fore and aft vision along the passenger cabin, to indicate emergency exits beyond and obscured by it, except that if this is not possible, the sign may be placed at another appropriate location.
 - (4) Each passenger emergency exit marking and each locating sign shall be manufactured to meet the interior emergency exit marking requirements under which the aeroplane was type certified, unless the Authority cites different requirements for compliance with this paragraph.
 - (5) Note: No sign may continue to be used if its luminescence (brightness) decreases to below 250 micro lamberts.
 - (6) Sources of general cabin illumination may be common to both the emergency and the main lighting systems if the power supply to the emergency light system is independent of the power supply to the main lighting system.
 - (7) The emergency lighting system shall provide enough general lighting in the passenger cabin so that the average illumination, when measured at 40-inch intervals at seat armrest height, on the centerline of the main passenger aisle, is at least 0.05 foot-candles.
 - (8) Each emergency light shall—
 - (i) Be operable manually both from the flight crew station and from a point in the passenger compartment that is readily accessible to a normal cabin crew member seat;
 - (ii) Have a means to prevent inadvertent operation of the manual controls; and
 - (iii) When armed or turned on at either station, remain lighted or become lighted upon interruption of the aeroplane's normal electric power.
 - (iv) Provide the required level of illumination for at least 10 minutes at the critical ambient conditions after emergency landing.
 - (v) Have a cockpit control device that has an "on", "off", and "armed" position.
 - (9) The location of each passenger emergency exit operating handle and instructions for opening the exit shall be shown in accordance with the requirements under which the aeroplane was type certified, unless the Authority cites different requirements for compliance with this paragraph.
 - (10) No operating handle or operating handle cover may continue to be used if its luminescence (brightness) decreases to below 100 micro lamberts.
 - (11) Access to emergency exits shall be provided as follows for each passenger carrying aeroplane:

- (i) Each passageway between individual passenger areas, or leading to a Type I or Type II emergency exit, shall be unobstructed and at least 20 inches wide.
 - (ii) There shall be enough space next to each Type I or Type II emergency exit to allow a crew member to assist in the evacuation of passengers without reducing the unobstructed width of the passageway below that required in paragraph (j)1. of this section.
 - (iii) There shall be access from the main aisle to each Type III and Type IV exit. The access from the aisle to these exits shall not be obstructed by seats, berths, or other protrusions in a manner that would reduce the effectiveness of the exit. In addition, the access shall meet the emergency exit access requirements under which the aeroplane was type certificated, unless the Authority cites different requirements for compliance with this paragraph.
 - (iv) If it is necessary to pass through a passageway between passenger compartments to reach any required emergency exit from any seat in the passenger cabin, the passageway shall not be obstructed. However, curtains may be used if they allow free entry through the passageway.
 - (v) No door may be installed in any partition between passenger compartments.
 - (vi) If it is necessary to pass through a doorway separating the passenger cabin from other areas to reach any required emergency exit from any passenger seat, the door shall have a means to latch it in open position, and the door shall be latched open during each takeoff and landing. The latching means shall be able to withstand the loads imposed upon it when the door is subjected to the ultimate inertia forces, relative to the surrounding structure, prescribed in the airworthiness standards for type certification in the transport category as cited by the Authority.
- (12) Each passenger emergency exit and the means of opening that exit from the outside shall be marked on the outside of the aeroplane with a 2-inch coloured band outlining the exit on the side of the fuselage.
- (13) Each passenger emergency exit marking, including the band, shall be readily distinguishable from the surrounding fuselage area by contrast in colour and shall comply with the following:
- (i) If the reflectance of the darker colour is 15 percent or less, the reflectance of the lighter colour shall be at least 45 percent.
 - (ii) If the reflectance of the darker colour is greater than 15 percent, at least a 30 percent difference between its reflectance and the reflectance of the lighter colour shall be provided.
 - (iii) Note: "Reflectance" is the ratio of the luminous flux reflected by a body to the luminous flux it receives.
 - (iv) Exits that are not in the side of the fuselage shall have external means of opening and applicable instructions marked conspicuously in red or, if red is inconspicuous against the background colour, in bright chrome yellow and, when the opening means for such an exit is located on only one side of the fuselage, a conspicuous marking to that effect shall be provided on the other side.
- (14) Each passenger-carrying aeroplane shall be equipped with exterior lighting that meets the requirements under which that aeroplane was type certificated, unless the Authority cites different requirement for compliance with this paragraph.
- (15) Each passenger-carrying aeroplane shall be equipped with a slip-resistant escape route that meets the requirements under which that aeroplane was type certificated, unless the Authority cites different requirements for compliance with this paragraph.

- (16) Each floor level door or exit in the side of the fuselage (other than those leading into a cargo or baggage compartment that is not accessible from the passenger cabin) that is 44 or more inches high and 20 or more inches wide, but not wider than 46 inches, each passenger ventral exit and each tail cone exit, shall meet the requirements of this section for floor level emergency exits.
- (17) Note: The Authority may grant a deviation from this paragraph if he finds that circumstances make full compliance impractical and that an acceptable level of safety has been achieved.
- (18) Approved emergency exits in the passenger compartments that are in excess of the minimum number of required emergency exits shall meet all of the applicable provisions of this subsection section and shall be readily accessible.
- (19) On each large passenger-carrying aeroplane with a ventral exit and tail cone exit shall be—
- (i) Designed and constructed so that it cannot be opened during flight; and
 - (ii) Marked with a placard readable from a distance of 30 inches and installed at a conspicuous location near the means of opening the exit, stating that the exit has been designed and constructed so that it cannot be opened during flight.
- (20) Portable lights. No person may operate a passenger carrying aeroplane unless it is equipped with flight stowage provisions accessible from each cabin crew member seat.

APP: 7.9.1.11 TYPES, NUMBER, LOCATION AND CONTENTS OF MEDICAL SUPPLIES

(a) Types

The different types of medical supplies shall be provided as follows:

- (1) [AAC] first-aid kit(s) for carriage on all aeroplanes and helicopters,
- (2) [AOC] universal precaution kit(s) for carriage on all aeroplanes and helicopters operating for the purpose of international commercial air transport operations and required a cabin crew member, and
- (3) [AOC] a medical kit for carriage where the aeroplane is operated for the purpose of international commercial air transport operations and authorized to carry more than 100 passengers on a sector length of more than two hours.

(b) Number of first-aid and universal precaution kits

- (1) [AAC] The number of first-aid kits shall be appropriate to the number of passengers which the aeroplane is authorized to carry:

<i>Passenger</i>	<i>First-aid kits</i>
0 – 100	1
101 – 200	2
201 – 300	3
302 – 400	4
401 – 500	5
More than 500	6

- (2) [AOC] In addition to the number of universal precaution kits carried in accordance to paragraph 7.9.1.11 (a) (2) and 7.9.1.11 (b) (2) of this part, additional kit(s) shall be made available at times of increased public health risk, such as during an outbreak of a serious communicable disease having pandemic potential. Such kits may be used to clean up any potentially infectious body contents such as blood, urine, vomit and faeces and to protect the cabin crew members who are assisting potentially infectious cases of suspected communicable disease.

(c) Location

- (1) First-aid and universal precaution kits shall be distributed as evenly as practicable throughout the passenger cabins. They shall be readily accessible to cabin crew members and the first-aid kits shall be located near the aircraft exits should their use be required outside the aircraft in an emergency situation.
- (2) The medical kit, when carried, shall be stored in an appropriate secure location.

(d) Contents

- (1) [AAC] First-aid kit

The required first-aid kit shall include at least the following:-

- (i) List of contents
- (ii) Antiseptic swabs (10/pack)
- (iii) Bandage: adhesive strips
- (iv) Bandage: gauze 7.5 cm × 4.5 m
- (v) Bandage: triangular; safety pins
- (vi) Dressing: burn 10 cm × 10 cm
- (vii) Dressing: compress, sterile 7.5 cm × 12 cm
- (viii) Dressing: gauze, sterile 10.4 cm × 10.4 cm
- (ix) Tape: adhesive 2.5 cm (roll)
- (x) Steri-strips (or equivalent adhesive strip)
- (xi) Hand cleanser or cleansing towelettes
- (xii) Pad with shield, or tape, for eye
- (xiii) Scissors: 10 cm
- (xiv) Tape: Adhesive, surgical 1.2 cm × 4.6 m
- (xv) Tweezers: splinter
- (xvi) Disposable gloves (multiple pairs)
- (xvii) Thermometers (non-mercury)
- (xviii) Mouth-to-mouth resuscitation mask with one-way valve
- (xix) First-aid manual, current edition
- (xx) Incident record form
- (xxi) Mild to moderate analgesic
- (xxii) Antiemetic
- (xxiii) Nasal decongestant
- (xxiv) Antacid
- (xxv) Antihistamine

- (2) [AOC] Universal precaution kit

The required universal precaution kit shall include at least the following:-

- (i) Dry powder that can convert small liquid spill into a sterile granulated gel
- (ii) Germicidal disinfectant for surface cleaning
- (iii) Skin wipes
- (iv) Face/eye mask (separate or combined)
- (v) Gloves (disposable)
- (vi) Protective apron
- (vii) Large absorbent towel
- (viii) Pick-up scoop with scraper
- (ix) Bio-hazard disposal waste bag
- (x) Instructions

(3) [AOC] Medical Kit – Aeroplanes

The required medical kit shall include the following equipment:

- (i) List of contents
- (ii) Stethoscope
- (iii) Sphygmomanometer (electronic preferred)
- (iv) Airways, oropharyngeal (three sizes)
- (v) Syringes (appropriate range of sizes)
- (vi) Needles (appropriate range of sizes)
- (vii) Intravenous catheters (appropriate range of sizes)
- (viii) Antiseptic wipes
- (ix) Gloves (disposable)
- (x) Needle disposal box
- (xi) Urinary catheter
- (xii) System for delivering intravenous fluids
- (xiii) Venous tourniquet
- (xiv) Sponge gauze
- (xv) Tape – adhesive
- (xvi) Surgical mask
- (xvii) Emergency tracheal catheter (or large gauge intravenous cannula)
- (xviii) Umbilical cord clamp
- (xix) Thermometers (non-mercury)
- (xx) Basic life support cards
- (xxi) Bag-valve mask
- (xxii) Flashlight and batteries

The required medical kit shall include the following drugs:

- (i) Epinephrine 1:1 000
- (ii) Antihistamine – injectable
- (iii) Dextrose 50% (or equivalent) – injectable: 50 ml
- (iv) Nitroglycerin tablets, or spray
- (v) Major analgesic
- (vi) Sedative anticonvulsant – injectable
- (vii) Antiemetic – injectable
- (viii) Bronchial dilator – inhaler
- (ix) Atropine – injectable
- (x) Adrenocortical steroid – injectable
- (xi) Diuretic – injectable
- (xii) Medication for postpartum bleeding
- (xiii) Sodium chloride 0.9% (minimum 250 ml)
- (xiv) Acetyl salicylic acid (aspirin) for oral use
- (xv) Oral beta blocker
- (xvi) If a cardiac monitor is available (with or without an automated external defibrillators - AED) Epinephrine 1:10000 (can be a dilution of epinephrine 1:1000) shall be added to the above list.

APP: 7.9.1.12 OXYGEN STORAGE AND DISPENSING APPARATUS

- (a) The supplemental oxygen supply requirements for non-pressurized aeroplanes are as follows:
 - (1) An operator shall not operate a non-pressurized aeroplane at pressure altitudes above 10000 ft unless supplemental oxygen equipment, capable of storing and dispensing the oxygen supplies required, is provided.
 - (2) The amount of supplemental oxygen for sustenance required for a particular operation shall be determined on the basis of flight altitudes and flight duration, consistent with the operating procedures, established for each operation in the Operations Manual and with the routes to be flown, and with the emergency procedures specified in the Operations Manual.
 - (3) An aeroplane intended to be operated above 10 000 ft pressure altitude shall be provided with equipment capable of storing and dispensing the oxygen supplies required.
 - (4) Oxygen supply requirements.
 - (i) Flight crew members. Each member of the flight crew on flight deck duty shall be supplied with supplemental oxygen in accordance with Table 1. If all occupants of flight deck seats are supplied from the flight crew source of oxygen supply then they shall be considered as flight crew members on flight deck duty for the purpose of oxygen supply.
 - (ii) Cabin crew members, additional crew members and passengers. Cabin crew members and passengers shall be supplied with oxygen in accordance with Table 1. Cabin crew members carried in addition to the minimum number of cabin crew members required, and additional crew members, shall be considered as passengers for the purpose of oxygen supply.

Table 1- Supplemental Oxygen for Non-Pressurized Aeroplanes

(a)	(b)
SUPPLY FOR:	DURATION AND PRESSURE ALTITUDE
1. All occupants of flight deck seats on flight deck duty	Entire flight time at pressure altitudes above 10,000 feet
2. All required cabin crew members	Entire flight time at pressure altitudes above 13,000 ft and for any period exceeding 30 minutes at pressure altitudes above 10,000 ft but not exceeding 13,000 ft
3. 100% of passengers (see note)	Entire flight time at pressure altitudes above 13,000 ft
4. 10% of passengers (see note)	Entire flight time after 30 minutes at pressure altitudes greater than 10,000 ft but not exceeding 13,000 ft

Note: For the purpose of this table “passengers” means passengers actually carried and includes infants

- (b) The supplemental oxygen supply requirements for pressurized aeroplanes are as follows:
 - (1) An operator shall not operate a pressurized aeroplane at pressure altitudes above 10000 ft unless supplemental oxygen equipment, capable of storing and dispensing the oxygen supplies required by this paragraph, is provided.
 - (2) The amount of supplemental oxygen required shall be determined on the basis of cabin pressure altitude, flight duration and the assumption that a cabin pressurization failure will occur at the altitude or point of flight that is most critical from the standpoint of oxygen need, and that, after the failure, the aeroplane will descend in accordance with emergency procedures specified in the Aeroplane Flight Manual to a safe altitude for the route to be flown that will allow continued safe flight and landing.

- (3) Following a cabin pressurization failure, the cabin pressure altitude shall be considered the same as the aeroplane pressure altitude, unless it is demonstrated to the Authority that no probable failure of the cabin or pressurization system will result in a cabin pressure altitude equal to the aeroplane pressure altitude. Under these circumstances, the demonstrated maximum cabin pressure altitude may be used as a basis for determination of oxygen supply.
- (4) Oxygen equipment and supply requirements.
 - (i) Flight crew members.
 - (A) Each member of the flight crew on flight deck duty shall be supplied with supplemental oxygen in accordance with Table 2. If all occupants of flight deck seats are supplied from the flight crew source of oxygen supply then they shall be considered as flight crew members on flight deck duty for the purpose of oxygen supply.
 - (B) Flight deck seat occupants, not supplied by the flight crew source, are to be considered as passengers for the purpose of oxygen supply.
 - (C) Oxygen masks shall be located so as to be within the immediate reach of flight crew members whilst at their assigned duty station.
 - (D) Oxygen masks for use by flight crew members in pressurized aeroplanes operating at pressure altitudes above 25000 ft, shall be a quick donning type mask.
 - (ii) Cabin crew members, additional crew members, and passengers.
 - (A) Cabin crew members and passengers shall be supplied with supplemental oxygen in accordance with Table 2. Cabin crew members carried in addition to the minimum number of cabin crew members required, and additional crew members, shall be considered as passengers for the purpose of oxygen supply.
 - (B) Aeroplanes intended to be operated at pressure altitudes above 25000 ft shall be provided sufficient spare outlets and masks and/or sufficient portable oxygen units with masks for use by all required cabin crew members. The spare outlets and/or portable oxygen units are to be distributed evenly throughout the cabin to ensure immediate availability of oxygen to each required cabin crew member regardless of his location at the time of cabin pressurization failure.
 - (C) Aeroplanes intended to be operated at pressure altitudes above 25000 ft shall be provided an oxygen dispensing unit connected to oxygen supply terminals immediately available to each occupant, whenever seated. The total number of dispensing units and outlets shall exceed the number of seats by at least 10 percent. The extra units shall be evenly distributed throughout the cabin.
 - (D) Aeroplanes intended to be operated at pressure altitudes above 25 000 ft or which, if operated at or below 25 000 ft, cannot descend safely within four minutes to 13 000 ft, and for which the individual certificate of airworthiness was first issued on or after 9 November 1998, shall be provided with automatically deployable oxygen equipment immediately available to each occupant, wherever seated. The total number dispensing units and outlets shall exceed the number of seats by at least 10 percent. The extra units shall be evenly distributed throughout the cabin.
 - (E) The oxygen supply requirements, as specified in Table 2, for aeroplanes not certificated to fly at altitudes above 25,000 ft, may be reduced to the entire flight time between 10,000 ft and 13,000 ft cabin pressure altitudes for all required cabin crew members and for at least 10% of the passengers if, at all points along the route to be flown, the aeroplane is able to descend safely within 4 minutes to a cabin pressure altitude of 13,000 ft.

Table 2 - Requirements for Supplemental Oxygen - Pressurized Aeroplane During and Following Emergency Descent (Note)

SUPPLY FOR:	DURATION AND CABIN PRESSURE ALTITUDE
1. All occupants of flight deck seats on flight deck duty flight	Entire flight time when the cabin pressure altitude exceeds 13,000 and entire time when the cabin pressure altitude exceeds 10,000 ft but does not exceed 13,000 ft after the first 30 minutes at those altitudes, but in no case less than: (i) 30 minutes for aeroplanes certificated to fly at altitudes not exceeding 25,000 ft (Note 2) (ii) 2 hours for aeroplanes certificated to fly at altitudes more than 25,000 ft (Note 3).
2. All required cabin crew members	Entire flight time when cabin pressure altitude exceeds 13,000 ft but not less than 30 minutes (Note 2), and entire flight time when cabin pressure altitude is greater than 10,000 ft but does not exceed 13,000 ft after the first 30 minutes at these altitudes.
3. 100% of passengers	10 minutes or the entire flight time when the cabin pressure altitude exceeds 13,000 ft whichever is the greater (Note 4)
4. 10% of passengers	Entire flight time when the cabin pressure altitude exceeds 10,000 ft but does not exceed 13,000 ft after the first 30 minutes at these altitudes.

Note 1: The supply provided shall take account of the cabin pressure altitude and descent profile for the routes concerned.

Note 2: The required minimum supply is that quantity of oxygen necessary for a constant rate of descent from the aeroplane's maximum certificated operating altitude to 10,000 ft in 10 minutes and followed by 20 minutes at 10,000 ft.

Note 3: The required minimum supply is that quantity of oxygen necessary for a constant rate of descent from the aeroplane's maximum certificated operating altitude to 10,000 ft in 10 minutes and followed by 110 minutes at 10,000 ft. The oxygen required to meet the Crew Protective Breathing Equipment provisions of this Part may be included in determining the supply required.

Note 4: The required minimum supply is that quantity of oxygen necessary for a constant rate of descent from the aeroplane's maximum certificated operating altitude to 15,000 ft.

Note 5: For the purpose of this table "passengers" means passengers actually carried and includes infants.

(c) The supplemental oxygen supply requirements for non-pressurized helicopters are as follows:

- (1) An operator shall not operate a non-pressurized helicopter at pressure altitudes above 10000 ft unless supplemental oxygen equipment, capable of storing and dispensing the oxygen supplies required, is provided.
- (2) The amount of supplemental oxygen for sustenance required for a particular operation shall be determined on the basis of flight altitudes and flight duration, consistent with the operating procedures, established for each operation in the Operations Manual and with the routes to be flown, and with the emergency procedures specified in the Operations Manual.
- (3) A helicopter intended to be operated above 10000 ft pressure altitude shall be provided with equipment capable of storing and dispensing the oxygen supplies required.

- (4) Oxygen supply requirements:
- (i) Flight crew members. Each member of the flight crew on flight deck duty shall be supplied with supplemental oxygen in accordance with Table 3. If all occupants of flight deck seats are supplied from the flight crew source of oxygen supply then they shall be considered as flight crew members on flight deck duty for the purpose of oxygen supply.
 - (ii) Cabin crew members, additional crew members and passengers. Cabin crew members and passengers shall be supplied with oxygen in accordance with Table 3. Cabin crew members carried in addition to the minimum number of cabin crew members required, and additional crew members, shall be considered as passengers for the purpose of oxygen supply.

Table 3- Supplemental Oxygen for Non-Pressurized Helicopters

(a) SUPPLY FOR:	(b) DURATION AND PRESSURE ALTITUDE
1. All occupants of flight deck seats on flight deck duty	Entire flight time at pressure altitudes above 10,000 feet
2. All required cabin crew members	Entire flight time at pressure altitudes above 13,000 ft and for any period exceeding 30 minutes at pressure altitudes above 10,000 ft but not exceeding 13,000 ft
3. 100% of passengers (see note)	Entire flight time at pressure altitudes above 13,000 ft
4.. 10% of passengers (see note)	Entire flight time after 30 minutes at pressure altitudes greater than 10,000 ft but not exceeding 13,000 ft

Note: For the purpose of this table “passengers” means passengers actually carried and includes infants.

APP: 7.9.1.19 LOCATION OF AN AEROPLANE IN DISTRESS

- (a) Purpose and Scope
 - (1) Location of an aeroplane in distress aims at establishing, to a reasonable extent, the location of an accident site within a 6 NM radius.
- (b) Operation
 - (1) An aeroplane in distress shall automatically activate the transmission of information from which its position can be determined by the operator and the position information shall contain a time stamp. It shall also be possible for this transmission to be activated manually. The system used for the autonomous transmission of position information shall be capable of transmitting that information in the event of aircraft electrical power loss, at least for the expected duration of the entire flight.
 - (2) An aircraft is in a distress condition when it is in a state that, if the aircraft behaviour event is left uncorrected, can result in an accident. Autonomous transmission of position information shall be active when an aircraft is in a distress condition. This will provide a high probability of locating an accident site to within a 6 NM radius. The operator shall be alerted when an aircraft is in a distress condition with an acceptable low rate of false alerts. In case of a triggered transmission system, initial transmission of position information shall commence immediately or no later than five seconds after the detection of the activation event.

Note 1.— Aircraft behaviour events can include, but are not limited to, unusual attitudes, unusual speed conditions, collision with terrain and total loss of thrust/propulsion on all engines and ground proximity warnings.

Note 2.—A distress alert can be triggered using criteria that may vary as a result of aircraft position and phase of flight. Further guidance regarding in-flight event detection and triggering criteria may be found in the EUROCAE ED-237, Minimum Aviation System Performance Specification (MASPS) for Criteria to Detect In-Flight Aircraft Distress Events to Trigger Transmission of Flight Information.

- (3) When an aircraft operator or an air traffic service unit (ATSU) has reason to believe that an aircraft is in distress, coordination shall be established between the ATSU and the aircraft operator.
- (4) The State of the Operator shall identify the organizations that will require the position information of an aircraft in an emergency phase. These shall include, as a minimum:
 - (i) air traffic service unit(s) (ATSU); and
 - (ii) SAR rescue coordination centre(s) (RCC) and sub-centres.
- (5) When autonomous transmission of position information has been activated, it shall only be able to be deactivated using the same mechanism that activated it.
- (6) The accuracy of position information shall, as a minimum, meet the position accuracy requirements established for ELTs.

APP: 7.10.1.13 COSMIC RADIATION DETECTION EQUIPMENT

- (a) Compliance with the sampling requirements in 7.10.1.13 (2) may be accomplished as follows:
 - (1) The sampling shall be carried out in conjunction with a Radiological Agency or similar organization acceptable to the Authority.
 - (2) Sixteen route sectors, which include flight above 15 000 m (49 000 ft), shall be sampled every quarter (three months). Where less than sixteen route sectors which include flight above 15000 m (49 000 ft) are achieved each quarter, then all sectors above 15 000 m (49 000 ft) shall be sampled.
 - (3) The cosmic radiation recorded shall include both the neutron and non-neutron components of the radiation field.
 - (4) The results of the sampling, including a cumulative summary quarter on quarter, should be reported to the Authority under arrangements acceptable to the Authority.

[Intentionally Left Blank]